

VLR 9-30-01  
NHP-10-9-03

United States Department of the Interior  
National Park Service

NATIONAL REGISTER OF HISTORIC PLACES  
REGISTRATION FORM

This form is for use in nominating or requesting determinations for individual properties and districts. See instructions in *How to Complete the National Register of Historic Places Registration Form* (National Register Bulletin 16A). Complete each item by marking "x" in the appropriate box or by entering the information requested. If any item does not apply to the property being documented, enter "N/A" for "not applicable." For functions, architectural classification, materials, and areas of significance, enter only categories and subcategories from the instructions. Place additional entries and narrative items on continuation sheets (NPS Form 10-900a). Use a typewriter, word processor, or computer, to complete all items.

1. Name of Property historic name Battery Court Historic District

other names/site number VDHR # 127-5897

2. Location street & number 2300 to 2900 blocks (depending on the street) of Dupont Circle, Edgewood, Fendall, Greenwood, Griffin, Hawthorne, Montrose, Moss Side, Noble and North and the cross streets of Edgehill, Graham, Lancaster, Norwood and Overbrook

city or town Richmond (Independent City) vicinity N/A

state Virginia code VA county N/A code 760 zip code 23220

3. State/Federal Agency Certification

As the designated authority under the National Historic Preservation Act of 1986, as amended, I hereby certify that this  nomination request for determination of eligibility meets the documentation standards for registering properties in the National Register of Historic Places and meets the procedural and professional requirements set forth in 36 CFR Part 60. In my opinion, the property  meets ~~does not meet~~ the National Register Criteria. I recommend that this property be considered significant nationally statewide  locally. (See continuation sheet for additional comments.)

  
Signature of certifying official/Title

  
Date

Director, Virginia Department of Historic Resources  
State or Federal agency and bureau

In my opinion, the property  meets ~~does not meet~~ the National Register criteria. ( See continuation sheet for additional comments.)

Signature of certifying official/Title \_\_\_\_\_ Date \_\_\_\_\_

State or Federal agency and bureau \_\_\_\_\_

4. National Park Service Certification

I, hereby certify that this property is:	Signature of the Keeper	Date of Action
entered in the National Register See continuation sheet.	_____	_____
determined eligible for the National Register See continuation sheet.	_____	_____
determined not eligible for the National Register	_____	_____
removed from the National Register	_____	_____
other (explain) _____	_____	_____

Battery Court Historic District (127-5897)  
Name of Property

Richmond (Independent City)  
County and State

**5. Classification**

Ownership of Property (Check as many boxes as apply)	Category of Property (Check only one box)	Number of Resources within Property (Do not include previously listed resources in the count)		
		Contributing	Non-contributing	
<input checked="" type="checkbox"/> private	building(s)	769	170	buildings
<input checked="" type="checkbox"/> public-local	<input checked="" type="checkbox"/> district	1 (Park)	0	sites
public-State	site	0	0	structures
public-Federal	structure	0	0	objects
	object	770	170	Total

**Name of related multiple property listing listed**  
(Enter "N/A" if property is not part of a multiple property listing.)  
Streetcar Suburbs in Northside Richmond, Virginia

**Number of contributing resources previously listed in the National Register**  
N/A

**6. Function or Use**

Historic Functions (Enter categories from instructions)	Current Functions (Enter categories from instructions)
<u>DOMESTIC: single dwelling, multiple dwelling</u>	<u>DOMESTIC: single dwelling, multiple dwelling</u>
<u>EDUCATION: school</u>	<u>EDUCATION: school</u>
<u>RELIGION: religious facility</u>	<u>RELIGION: religious facility</u>

**7. Description**

Architectural Classification (Enter categories from instructions)	Materials (Enter categories from instructions)
<u>LATE 19<sup>TH</sup> AND 20<sup>TH</sup> CENTURY REVIVALS:</u>	foundation <u>N/A</u>
<u>Colonial Revival, Classical Revival, Tudor Revival, Mission</u>	walls <u>WOOD, STUCCO, BRICK</u>
<u>LATE 19<sup>TH</sup> AND 20<sup>TH</sup> CENTURY AMERICAN</u>	<u>STONE</u>
<u>MOVEMENTS: Bungalow/Craftsman, Prairie School</u>	roof <u>METAL: standing seam</u>
	<u>STONE: slate</u>
	other <u>N/A</u>

**Narrative Description**

(Describe the historic and current condition of the property on one or more continuation sheets.)

See continuation sheet

Battery Court Historic District (127-5897)  
Name of Property

Richmond (Independent City)  
County and State

**8. Statement of Significance** **Applicable National Register Criteria**

**Areas of Significance**

(Mark "x" in one or more boxes for the criteria qualifying the property for National Register listing)

(Enter categories from instructions)

**A** Property is associated with events that have made a significant contribution to the broad patterns of our history.

ARCHITECTURE

**B** Property is associated with the lives of persons significant in our past.

COMMUNITY PLANNING & DEVELOPMENT

TRANSPORTATION

**C** Property embodies the distinctive characteristics of a type, period, or method of construction or represents the work of a master, or possesses high artistic values, or represents a significant and distinguishable entity whose components lack individual distinction.

**Period of Significance**

1910 to 1949

**D** Property has yielded, or is likely to yield, information important in prehistory or history.

**Criteria Considerations**

(Mark "X" in all the boxes that apply.)

Property is:

**A** owned by a religious institution or used for religious purposes.

**B** removed from its original location.

**C** a birthplace or a grave.

**D** a cemetery.

**E** a reconstructed building, object, or structure.

**F** a commemorative property.

**G** less than 50 years of age or achieved significance within the past 50 years.

**Significant Dates**

**Significant Person**

(Complete if Criterion B is marked above)

**Cultural Affiliation**

N/A

**Architect/Builder**

**Narrative Statement of Significance**

(Explain the significance of the property on one or more continuation sheets.)

**9. Major Bibliographical References**

**Bibliography**

(Cite the books, articles, and other sources used in preparing this form on one or more continuation sheets.)

**Previous documentation on file (NPS)**

preliminary determination of individual listing (36 CFR 67) has been requested.

previously listed in the National Register

previously determined eligible by the National Register

designated a National Historic Landmark

recorded by Historic American Buildings Survey

# \_\_\_\_\_

recorded by Historic American Engineering

Record # \_\_\_\_\_

**Primary Location of Additional Data**

State Historic Preservation Office

Other State agency

Federal agency

Local government

University

Other

Name of repository: \_\_\_\_\_

Battery Court Historic District (127-5897)  
Name of Property

Richmond (Independent City)  
County and State

**10. Geographical Data**

Acreage of Property 181 acres

**UTM References**

(Place additional UTM references on a continuation sheet)

1	<u>18</u>	<u>284705</u>	<u>4160855</u>	3	<u>18</u>	<u>285080</u>	<u>4160315</u>
	Zone	Easting	Northing		Zone	Easting	Northing
2	<u>18</u>	<u>284670</u>	<u>4160410</u>	4	<u>18</u>	<u>285070</u>	<u>4159960</u>
					X	See continuation sheet.	

**Verbal Boundary Description**

(Describe the boundaries of the property on a continuation sheet.)

**Boundary Justification**

(Explain why the boundaries were selected on a continuation sheet.)

**11. Form Prepared By**

name/title Kimberly Merkel Chen, Mary Harding Sadler, Peter McDearmon Witt, Jean McRae  
organization Kimberly M. Chen & Associates, Inc. date 7 March 2001, revised June 2003  
street & number 2701 East Broad Street telephone 804-225-9560  
city or town Richmond state VA zip code 23223

**Additional Documentation**

Submit the following items with the completed form:

**Continuation Sheets**

**Maps**

A **USGS map** (7.5 or 15 minute series) indicating the property's location.

A **Sketch map** for historic districts and properties having large acreage or numerous resources.

**Photographs**

Representative **black and white photographs** of the property.

**Additional items**

(Check with the SHPO or FPO for any additional items)

**Property Owner**

(Complete this item at the request of the SHPO or FPO.)

name (See Attached List)  
street & number N/A telephone N/A  
city or town N/A state N/A zip code N/A

**Paperwork Reduction Act Statement:** This information is being collected for applications to the National Register of Historic Places to nominate properties for listing or determine eligibility for listing, to list properties, and to amend existing listings. Response to this request is required to obtain a benefit in accordance with the National Historic Preservation Act, as amended (16 U.S.C. 470 et seq.).

**Estimated Burden Statement:** Public reporting burden for this form is estimated to average 18.1 hours per response including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding this burden estimate or any aspect of this form to the Chief, Administrative Services Division, National Park Service, P.O. Box 37127, Washington, DC 200137127; and the Office of Management and Budget, Paperwork Reductions Project (10240018), Washington, DC 2050

United States Department of Interior  
National Park Service

## National Register of Historic Places Continuation Sheet

Section number   7   Page   1  

---

Battery Court Historic District (127-5897)  
Richmond, VA

### SUMMARY DESCRIPTION

The Battery Court Historic District, a turn of the twentieth century streetcar suburb in North Richmond, Virginia, is defined by its park-like ambiance. The neighborhood is almost exclusively residential, with two churches and several North Avenue commercial buildings on its easternmost edge. An irregular ravine runs diagonally between the southeast and northwest corners of the historic district, disrupting the gridded streets and alleys with an organic layout that heightens the neighborhood's picturesque qualities. Within the ravine is a well-tended city park. At the north end of the historic district a grassy median in the 2900 block of Hawthorne Avenue links Battery Park to Pollard Park. The arborescent streets are lined with bungalows and Colonial Revival houses. Tudor Revival and Spanish Mission style houses add variety to a streetscape where solid American Foursquare houses are the norm.

The northernmost edge of the Battery Court Historic District is Brookland Park Boulevard. On the east and south, the boundary is shared with the Barton Heights and Brookland Park Historic Districts. These boundaries were established by the neighborhood's original owner-developers. There are 769 contributing buildings (549 main buildings and 220 outbuildings), one contributing site (Battery Park), and 170 noncontributing resources in the historic district.

### ARCHITECTURAL ANALYSIS

The Battery Court Historic District is a verdant neighborhood whose primary axis is the city's Battery Park. Though the park lies in a linear ravine with only a single crossing at Overbrook Road, it unifies the neighborhood rather than dividing it. The parkland was acquired by the city from the neighborhood's developers in 1922. The city graded and improved this 11.8-acre property, adding ramps, walkways, and playgrounds in the 1920s and '30s. From the late 1930s through the early 1940s new facilities were constructed, including a quaint, one-story, octagonal structure surfaced with cobblestones. As with other city parks, the Works Progress Administration helped to fund Battery Park's improvements.

The historic district is filled with single-family homes, consistent in scale and character. Most are two stories tall enclosing between 2,000 and 4,000 square feet of living space. The houses in the Battery Court Historic District are slightly larger than those in the adjacent

**United States Department of Interior**  
National Park Service

**National Register of Historic Places**  
**Continuation Sheet**

Section number 7 Page 2

---

Battery Court Historic District (127-5897)  
Richmond, VA

Brookland Park Historic District, in part because of the larger lot sizes.<sup>1</sup> Furthermore, Battery Court includes more brick buildings than either Barton Heights or Brookland Park. Consistent with other early Northside Richmond suburbs, most Battery Court houses feature a single-story porch spanning the facade, and most reflect the American Colonial Revival or Bungalow styles. The district's only commercial buildings are small one- and two-story storefronts clustered on the west side of North Avenue at the district's edge. The district's two churches are the Classical Revival Overbrook Presbyterian Church (now All Souls Presbyterian) and Battery Park Christian Church (now Mount Hermon Baptist); a frame building which closely resembles the surrounding single-family homes.

In the northern portion of the historic district, most houses front on streets oriented north and south, such as Noble, Moss Side, Montrose, Edgewood, and Griffin Avenues. In the southern portion the streets, including Edgehill, Norwood, Lancaster, and Graham Roads, run east-west. The diagonal ravine created by Griffin's Branch and Battery Park disrupts the grid. The north-south orientation of Fendall Street, Montrose Avenue, and Hawthorne Avenue (an extension of the North Richmond Road) is deformed to accommodate the Battery Park ravine. Short streets like The Terrace and Dupont Circle are curved in response to the topography and tend to hold some of the district's more distinctive homes. Overbrook, a tree-lined avenue, is the only east-west street which spans the whole district. It is lined with single- and multi-family dwellings.

The American Foursquare is the predominant house type in the Battery Court Historic District, though there tends to be greater variety in the houses lining Battery Park. Along the park's edge examples of Tudor Revival (2800 Dupont Circle), Italian Renaissance/ Spanish Mission (2604 Hawthorne Avenue), and Prairie Style (2814 Dupont Circle) relieve the persistence of the Foursquare prototype. Overbrook Presbyterian (now All Souls Presbyterian) is the sole example of the Classical Revival style in the historic district.

Queen Anne (1910s)

Because of the later development of the Battery Court Historic District there are few examples of the Queen Anne style. In contrast there are many Queen Anne dwellings in the neighboring

**United States Department of Interior**  
National Park Service

**National Register of Historic Places**  
**Continuation Sheet**

Section number   7   Page   3  

---

Battery Court Historic District (127-5897)  
Richmond, VA

Barton Heights and Brookland Park Historic Districts. 301 Lancaster Road, a late example of the Queen Anne style, is a one-and-a-half-story frame cottage built in the 1910s. This small-scale dwelling exhibits the exuberance of the style with a complex cross-gabled standing-seam metal roof and a pyramidal-roofed entry tower. The asymmetrical mass sheathed in weatherboard, displays projecting bays, tripartite window openings and a lunette window in the gable end.

Colonial Revival (1910s-1949)

The Colonial Revival style is characterized by simple massing, box cornices, molded casings, symmetrical window openings, and generic details recalling American Colonial architecture. With the Bungalow style, the Colonial Revival dominates the residential architecture of Battery Court. Largely based on the American Foursquare prototype, these houses, duplexes, and small apartment buildings are clad in weatherboard, rendered in stucco, or surfaced with gunnite. Most of the roofs are hipped with cross gables (or center dormers), and are less complex than the Queen Anne style houses. The more high-style Colonial Revival examples have pedimented doors or entryways, dentils or modillions, and patterned upper window sashes.

In the transition from the Queen Anne style to the Colonial Revival, the asymmetries of the former style remained popular. 102 W. Graham Road is a two-story frame house with a hipped roof, cross gables, and two cast block chimneys. Square, fluted, Ionic columns support the roof of the asymmetrical, one-story, front porch. A pediment at the porch roof announces the entry. 11 W. Norwood Avenue shares many of the same features and characteristics.

The inherent solidity and balance of the colonial Georgian is more typical of the neighborhood. 2810 Dupont Circle (Barney Briel<sup>2</sup> House) is a symmetrical, two-story house surfaced with gunnite. A one-story porch spans the facade of the house with an elaborate central entry sequence, expressed by brick pylons that rise to create a second-floor balcony. Tuscan columns and a turned balustrade define the porch, which is built on brick piers. On both floors, doorways incorporate sidelights and transoms, with a single leaf door at the first floor and two-leafed French door at the second.

United States Department of Interior  
National Park Service

**National Register of Historic Places  
Continuation Sheet**

Section number   7   Page   4  

---

Battery Court Historic District (127-5897)  
Richmond, VA

Contractor Meverell B. Van Doren's substantial brick house at 2911 Hawthorne Avenue (c. 1910) is two stories with a hipped roof. Van Doren's appreciation for the Georgian style is expressed by stone jack arches and the pediment at the porch's central entry. Its patterned fan light and sidelights distinguish the front door.

One of the neighborhood's most highly crafted houses is 2809 Montrose, the house of stone setter T. J. Cromar.<sup>3</sup> The house is clad in a smooth-faced, random-ashlar stone. Molded cartouches accentuate the gable end centered over the fanlit entry.

A number of apartments and multi-family dwellings were built in the Battery Court District, and most represent the Colonial Revival style. 2801 Montrose Avenue is a symmetrical, two-story, brick apartment house. Two-story porches centered on projecting bays flank the center entry. The pedimented porches feature molded cornices and dentil moldings. A stepped parapet hides the shed roof. At the entry facade the parapet terminates in consoles at the corners of the projecting bays. The brick is laid in six-course American bond.

Other multi-family dwellings are found on North Avenue, the neighborhood's commercial center, and on Overbrook Road. 2500 North Avenue is a gable-roofed, two-story, brick duplex with a two-story pedimented porch centered on the street façade. 814 Overbrook Road is a three-story brick apartment house built in 1920s. Near the commercial intersection with Chamberlayne Avenue, the nine-bay building makes a transition between the lower scale residential neighborhood and the businesses on Chamberlayne. The prominent central bay accents the pedimented ground floor entry and terminates in a ramped parapet. Windows are also articulated: with a plaster surround at the second floor and with a key-stoned arch at the third floor. Identical one-bay porches are centered on the 4-bay blocks flanking the entrance. The porches are enhanced with full modillioned entablatures at three levels. Tuscan columns support the upper porches, while brick piers with Tuscan capitals enclose the first-floor porches.

One of the two churches in Battery Court, Mount Hermon Baptist Church at 2814 Moss Side Avenue, was built in the Colonial Revival style as the Battery Park Christian Church. A weatherboarded temple-form frame building, it has the residential scale and character of its neighbors. The pedimented gable end is echoed in the simplified pediment of the one-bay

**United States Department of Interior**  
National Park Service

**National Register of Historic Places**  
**Continuation Sheet**

Section number   7   Page   5  

---

Battery Court Historic District (127-5897)  
Richmond, VA

central porch. Fluted Roman Doric columns support the porch roof. This church property marks the northern limit of Battery Park.

Bungalow/Craftsman (1910s-1920s)

Bungalow style houses rivaled the Colonial Revival style for popularity in the Battery Court Historic District. Most of these builder-designed American Foursquare houses were surfaced with stucco or gunnite, but there are notable examples in brick. These Bungalow style houses frequently have hipped roofs and raised one-story, front porches with prominent piers. The rafters are often exposed within deep eaves, and the roof is sometimes further accentuated with a centered dormer. As is typical throughout the district, groups of very similar houses incorporate subtle differentiation in the shaping of dormers and in the details of porch piers and balustrades.

2721 Montrose Avenue represents the classic small-scale bungalow. One-story, brick and symmetrical, the four-bay dwelling has deep overhangs on scrolled outriggers. The single-bay center porch repeats the house's pyramidal roof. Triple Tuscan colonettes on brick piers mark the corners of the porch. 607 Edgehill Road presents similar massing, materials, and details.

2909 Montrose Avenue is another Bungalow style house with a gunnite surface. One story tall and three bays wide with a low-pitch gable roof, it has a wide, centered, gable dormer with a tripartite window. Matching chimneys penetrates the prominent roof overhang. A one-story three-bay porch runs the length of the facade. Four, massive, gunnite-covered columns on brick piers carry the porch's segmental arches.

An older example from the 1910s, 108 W. Lancaster is a one-and-a-half story, gable-roofed house with two splayed gable-end dormers. The street facade is asymmetrically divided between a three-bay porch and a tripartite window bay. The porch piers and the front foundation wall are faced in broken ceramic tile. Tapering box columns hold up the deep-eaved roof.

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 6

---

Battery Court Historic District (127-5897)  
Richmond, VA

Commercial Style (1920s-1930s)

Battery Court's small commercial district meets the neighboring Barton Heights and Brookland Park Historic Districts along North Avenue between Norwood Avenue and Graham Road. The one-story storefronts at 2416 and 2418-2420 North Avenue date from the 1930s and both have recessed entrances between large shop window openings. They are constructed of brick laid in stretcher bond, with simple panels expressed in brick at the parapeted roofline. On either side are the more typical two-story mixed-use brick buildings of earlier decades. The lower floors housed businesses, while apartments filled the upper floors.

Classical Revival (1940s)

Overbrook Presbyterian Church (now All Souls Presbyterian) at 19 Overbrook Road is the sole example of the Classical Revival style in the Battery Court Historic District. The brick sanctuary features a Doric portico *in antis* flanked by bays that form truncated corner towers. The walls terminate in parapets. The principal floor, above a raised basement, is reached by a broad flight of concrete steps framed by brick plinths. Windows in the tower bays are pedimented and rest on consoles. The Doric columns and pilaster capitals are stone, as are the sills and copings. Cast-iron light standards terminate the stair sequence at grade. A pair of double-leaf, entry doors with transoms and paired windows above fill the sides of the recessed portico. At center is mural of the Christ.

Prairie School (1920s)

2814 Dupont Circle (George Bernier House) is a fine example of the Prairie School. Two stories, with multiple green-tiled roofs and deep overhangs, the orange-colored brick dwelling is asymmetrically balanced. Banded casement windows in the one-story hip-roofed solarium assert the horizontal, as does the projecting water table and the broad eaves. An open brick arch frames the recessed entry. Nearby 2816 Dupont Circle, is executed in the same materials but with Colonial Revival details.

**United States Department of Interior  
National Park Service**

**National Register of Historic Places  
Continuation Sheet**

Section number   7   Page   7  

---

Battery Court Historic District (127-5897)  
Richmond, VA

Spanish Mission (1920s)

Exemplifying other revival styles popular with the new century's builders, 2604 Hawthorne Avenue was built in an Italian Renaissance style with elements of Spanish Mission style. The two-story frame dwelling rendered in stucco, the house features a central hipped roof mass balanced by one-story wings on either side. The front porch is arched with a recessed entry. The enclosed solarium is also arcaded. Rafter ends project from either wing, mimicking Spanish Mission construction techniques. A molded stringcourse separates the centered four windows at the ground floor and the two sets of paired windows at the second floor.

Tudor Revival (1920s)

It's likely that Richmond architect Bascom J. Rowlett<sup>4</sup> designed his own Tudor Revival style house at 2800 Dupont Circle in the 1920s. A two-story frame structure rendered in stucco, its complex roofs are covered in slates. The picturesque composition of the façade includes an interior chimney and a single-bay porch with fanciful turned colonettes, which swirl to onion shapes at the tops. The windows are casements. A garage at the rear of the property was designed in the same style and materials.

2506 Hawthorne Avenue is a two-story, gable-roofed house finished in stucco with brick accents. The entrance is expressed as a one-story brick projection. The gable end is half-timbered. Balancing the left side is a (now-enclosed) one-bay porch framed by a segmental arch. French doors on the ground floor and two windows above flank a central interior chimney, built in brick.

813 Edge Hill Road is a two-story building with a brick-faced first floor and a stuccoed second floor. A projecting one-story gable end announces its asymmetrical entry. The façade's half-timbered gable end projects from the mass of the house. A cast stone key and quoins distinguish the arched front entry. Tripartite windows light both floors. The ground floor windows are shifted off-center in order to accommodate the entry.

**United States Department of Interior**  
National Park Service

**National Register of Historic Places**  
**Continuation Sheet**

Section number   7   Page   8  

---

Battery Court Historic District (127-5897)  
Richmond, VA

The two-story five-bay façade of 2502 North Avenue, an apartment building, has a vestibule entry flanked by two one-story porches. The gable roof has a modillion cornice. A Flemish curvilinear parapet completes the masonry wall of the facade.

By Mary Harding Sadler

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 9

Battery Court Historic District (127-5897)  
Richmond, VA

**INVENTORY**

(This inventory was developed from a survey conducted by Vanessa Gilmore-Hicks and Brian Cox for Richmond Neighborhood Housing Services. The survey was begun in 1998 and completed in 2000. The outbuildings were noted by Jean McRae in 2003.)

**Battery Park Area**  
**No Addresses**

Battery Park, 1922 City Park. Stone-faced retaining walls and other infrastructure funded by the Works Progress Administration.

Battery Park Community Center, 1940s, 1-story, octagonal, coursed rubble, stone building, pyramidal slate roof with 2 gabled dormers, enclosed stone portico

Battery Park Pool House, 1960s, 1-story, brick, cross gable roof, **NC**

Utility Building, 1970s, 1-story brick, side gable roof, **NC**

Picnic Shelter, **NC**

**Dupont Circle**

**2800 Block (Even)**

- 2800 Bascom J. Rowlett, AIA, Residence, 1930s, Tudor Revival, 2-story, stuccoed house, cross-gable roof, front chimney, paired casement windows  
Concrete Block Garage/Carriage House
- 2802 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with cross-gable and shed-dormer, 2-bay arched porch with roof balustrade, pilasters and entablature at entry  
Metal Garage, **NC**
- 2804 D. P. Boyer Residence, 1920s, Colonial Revival, 2-story, frame house, gambrel roof with full-facade shed dormer, interior-side chimney, hip-roofed porch with Tuscan columns, transom
- 2806 1920s, Colonial Revival, 2-story, stuccoed house, gable roof with hip-roofed dormer, interior-side chimney, porch with Tuscan columns and brick piers, turned balustrade  
Stucco Garage
- 2810 Barney Briel Residence, 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, 2 interior chimneys porch with Tuscan columns and brick piers, turned balustrade, transom and sidelights  
Stucco Garage/Carriage House

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 10

Battery Court Historic District (127-5897)  
Richmond, VA

- 2812 1990s, **NC**  
2814 George N. Bernier Residence, 1920s, Prairie School, 2-story, stretcher bond brick house, tiled hip roof, 2 interior side chimneys, one-bay, arched porch, 1-story, hip-roofed projecting bay with corner piers with cast stone caps  
Brick Garage  
2816 George J. Bernier Residence, 1920s, Colonial Revival, 2-story, stretcher bond brick house, tiled hip-roofed, interior-side chimney, hip-roofed porch with brick piers with cast stone caps, tripartite and paired windows  
2818 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, interior-side chimney, porch with brick piers and Tuscan columns, Chinese roof balustrade, tripartite windows, sidelights and transom  
Metal Shed, **NC**

**Dupont Circle**

2800 Block (Odd)

- 2817 1960s, 1-story dwelling, **NC**, Brick Playhouse, **NC**

**Edge Hill Road**

600 Block (Even)

- 600 1956, **NC**  
606 1920s, Colonial Revival, 2-story, frame house, gambrel-roofed with full-width shed dormer, interior-side chimney, porch with pedimented entry-bay and Tuscan columns  
Metal Garage

**Edge Hill Road**

600 Block (Odd)

- 601 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed, interior-side chimney, hip-roofed porch with stuccoed posts and arched spans between posts  
Stucco Workshop  
603 1920s, Bungalow/Craftsman, 2-story, frame house with brick-tex siding, hip-roofed, interior-side chimney, hip-roofed porch with stuccoed posts  
605 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, interior-side chimney, hip-roofed porch with tapered columns on brick piers

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 11

Battery Court Historic District (127-5897)  
Richmond, VA

- Metal Garage, NC**
- 607 1930s, Bungalow/Craftsman, 1-story, Flemish bond brick house, hip-roofed, 2 stone interior-side chimneys, hip-roofed porch with Tuscan columns on stone piers
- Stucco Garage/Carriage House**
- Edge Hill Road**  
**800 Block (Even)**
- 800 1920s, Colonial Revival, 2-story, six-course American brick bond and frame house, gambrel roof with full-width shed dormer, interior-side chimney, porch with pedimented entry-bay
- Concrete Block Garage/Carriage House**
- 802 1920s, Colonial Revival, 2-story, frame house, gambrel roof with full-width shed dormer, a interior-side chimney, porch with pedimented entry bay and Tuscan columns
- Metal Garage**
- 804 1920s, Colonial Revival, 2-story, frame house, gambrel roof with full-width shed dormer, porch with pedimented entry-bay and colonettes
- Metal Garage**
- 806A&B 1920s, Colonial Revival, 2-story, six-course American bond, brick house, side-gable-roofed with front hip-roofed projection
- Two Metal Garages, 2 NC**
- 808A&B 1920s, Colonial Revival, 2-story, six-course American bond, brick house, side-gable-roofed with a front gable projection and a gabled dormer
- Two Metal Garages**
- 810A&B 1920s, Colonial Revival, 2-story, six-course American bond brick house, side-gable-roofed with front gable projection
- Metal Garage, NC**
- 812 1950s, Colonial Revival, 2-story, a six-course American bond brick house, side-gable-roofed with three gabled dormers, exterior-side, arched pedimented porch with square, **NC**
- 814 1955, Colonial Revival, 2-story, six-course American bond brick house, side-gable-roofed with 2 gabled dormers, exterior-side chimney, gable-roofed porch with square posts, **NC**
- Asbestos Shed, NC**
- 816 1930s, Bungalow/Craftsman, 2-story, frame house with aluminum siding, hip-roofed with hip-roofed dormer, interior-side chimney, hip-roofed porch with Tuscan columns on brick piers

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 12

Battery Court Historic District (127-5897)  
Richmond, VA

- 818 1930s, Bungalow/Craftsman, 2-story, frame house with aluminum siding, hip-roofed, interior-side chimney, hip-roofed porch with square columns on brick piers  
Parged Garage, NC

**Edge Hill Road**  
800 Block (Odd)

- 801 1920s, Bungalow/Craftsman, 2-story, frame house, hip-roofed with a hip-roofed dormer, interior-side chimney, hip-roofed porch with paired Tuscan columns on brick piers  
Stucco Garage
- 803 1920s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, interior-side chimney, hip-roofed porch with square columns on brick piers  
Metal Garage, Other Outbuilding demolished as of 2003
- 805 1920s, Colonial Revival, 2-story, six-course American bond, brick house, a side-gable-roofed with a shed-dormer, interior-side chimney, shed-roofed porch with pediment and square paneled  
Metal Garage/Carriage House
- 807 1920s, Bungalow/Craftsman, 2-story, six-course American bond brick house, jerkinhead-roof with exposed rafters, jerkinhead-roofed dormer, interior-side chimney, shed-roofed porch with paired, square paneled columns on brick piers  
Outbuilding demolished as of 2003
- 809 1955, Colonial Revival, 2-story, six-course American bond brick house, side-gable-roofed, three gabled dormers, interior-side chimney, gable-roofed porch with square posts, NC
- 811 1920s, Bungalow/Craftsman, 2-story, frame house, hip-roofed with hip-roofed dormer, interior-side chimney, hip-roofed porch with tapered brick piers  
Outbuilding, NC
- 813 1920s, Tudor Revival, 2-story, stuccoed and a seven-course American bond brick house, front-gable roof with hip-roofed side projections, interior-side chimney, tripartite windows, arched entry, half-timber and quoins
- 815 1920s, Colonial Revival, 2-story, frame house, cross gable roof, central interior chimney, paired windows, portico with roof balustrade  
Metal Garage

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 13

Battery Court Historic District (127-5897)  
Richmond, VA

- 817-819 1920s, Tudor Revival, 2-story, frame house, cross-gable roof with front-gabled projection and 2 gabled wall dormers, exterior side chimney, arched brick entrance  
Parged Garage, NC

**Edgewood Avenue**  
2600 Block (Even)

- 2600 1920s, Colonial Revival, 2-story, frame house, side-gable-roofed, exterior side chimney, shed-roofed porch with square posts  
2602 1920s, Colonial Revival, 2-story, frame house, hip-roofed, exterior side chimney, porch with Tuscan columns  
2604 1920s, Bungalow/Craftsman, 2-story, rusticated block house, side-gable-roofed with shed dormer, interior side chimney, shed-roofed porch with paired on brick piers  
2606 1920s, Bungalow/Craftsman, 2-story, frame house, side-gable-roofed has with shed dormer, exterior side chimney, exposed rafters, shed-roofed porch with paired posts on brick piers, tripartite window  
Metal Garage, NC  
2608 1920s, Bungalow/Craftsman, 2-story, frame house, side-gable-roofed with gabled dormer, exposed rafters, exterior-side chimney, shed-roofed porch with paired posts on brick piers, tripartite window

**Edgewood Avenue**  
2600 Block (Odd)

- 2601 1920s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, exterior-side chimney, hip-roofed porch with square posts  
Metal Garage/Carriage House  
2603 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, interior-side chimney, hip-roofed with tapered brick posts  
2605 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, exposed rafters, interior-side chimney, hip-roofed porch with square stuccoed posts  
2607 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, interior-side chimney, hip-roofed porch with square stuccoed posts  
Metal Garage  
2609 1920s, Bungalow/Craftsman, 2-story, frame house, side-gable-roofed with gabled dormer, interior-side chimney, shed-roofed porch with paneled square posts

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 14

Battery Court Historic District (127-5897)  
Richmond, VA

Metal Garage

- 2611 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, interior-side chimney, shed-roofed porch with tapered brick posts, paired windows, sidelights and transom
- 2613 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, exposed rafters, hip-roofed porch with tapered brick posts
- 2615 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, exposed rafters, hip-roofed porch with fluted Tuscan columns
- 2617 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, exposed rafters, interior-side chimney, hip-roofed porch with fluted square columns

Metal Garage/Carriage House

**Edgewood Avenue**

2700 Block (Even)

- 2700 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with 2 gabled wall dormers, exterior side chimney, porch with square posts
- 2702 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with 2 gabled wall dormers, exterior side chimney, porch with square stuccoed piers
- 2704 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with 2 gabled wall dormers, exterior side chimney, porch with square posts
- 2712 1920s, Colonial Revival, 2-story, frame house with Permastone, side-gable-roofed, exterior side chimney, shed-roofed porch with tapered posts
- 2714 1920s, Colonial Revival, 2-story, rusticated block house, side-gable-roofed, interior side chimney, shed-roofed porch with tapered posts
- 2716 1920s, Bungalow/Craftsman, 2-story, frame house, jerkinhead-roofed, eaves brackets, interior side chimney, hip-roofed porch with tapered posts on brick piers
- 2718 1920s, Bungalow/Craftsman, 2-story, frame house, side-gable-roofed with gabled dormer with brackets, interior side chimney, shed-roofed porch with Tuscan columns on brick piers
- 2720 1920s, Bungalow/Craftsman, 2-story, frame house, side-gable-roofed with shed dormer, eaves brackets, interior side chimney, shed-roofed porch with square posts on brick piers

Metal Garage, NC; Other Outbuilding demolished as of 2003

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 15

Battery Court Historic District (127-5897)  
Richmond, VA

**Edgewood Avenue**

2700 Block (Odd)

- 2701 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, exposed rafters, interior-side chimney, hip-roofed porch with fluted Tuscan columns  
Metal Garage/Carriage House
- 2703 1920s, Bungalow/Craftsman, 2-story, frame house, hip-roofed with hip-roofed dormer, exposed rafters, interior-side chimney, hip-roofed porch with Tuscan columns, tripartite window  
Metal Garage/Carriage House
- 2705 1960s, **NC**; Wood Shed, **NC**
- 2711 1960s, **NC**
- 2715 1960s, **NC**
- 2721 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed, hip-roofed porch with tapered posts  
Wood Shed, **NC**
- 2723 1920s, Colonial Revival, 2-story, frame house with Permastone, hip-roofed with 2 wall dormers, interior-side chimney, hip-roofed porch with sided-piers
- 2725 1920s, Colonial Revival, 2-story, frame house with vinyl siding, hip-roofed with 2 wall dormers, interior-side chimney, hip-roofed porch with Tuscan columns

**Edgewood Avenue**

2800 Block (Even)

- 2800 1920s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, interior side chimney, wraparound porch with square posts spanned by turned balustrade, tripartite window  
Metal Garage
- 2802 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with gabled dormer, interior chimney, 2-story, porch with brick piers  
Concrete Block Garage
- 2804 1950s, Colonial Revival, 2-story, stretcher bond brick house, hip-roofed, concrete stoop **NC**  
Metal Garage, **NC**
- 2806 1930s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, hip-roofed porch with paneled posts  
Wood Garage/Carriage House

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 16

Battery Court Historic District (127-5897)  
Richmond, VA

- 2808 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with 2 gable-roofed wall dormers, side-exterior chimney, hip-roofed porch with square posts  
Concrete Block Garage, NC
- 2812 1920s, Bungalow/Craftsman, 1 2-story, stuccoed house, side-gable-roofed with gabled dormer, exposed rafters, shed-roofed porch with Tuscan columns on brick piers, paired windows, transom
- 2814 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, wraparound porch with Tuscan columns, paired windows, sidelights and transom  
Metal Garage, NC
- 2816 1910s, Colonial Revival, 2-story, frame house, hip-roofed with 2 pedimented dormers, interior-side chimney, hip-roofed porch with fluted tapered posts and turned balustrade, tripartite window with a fanlight, decorative glazing  
Vinyl Sided Garage, NC
- 2818 1920s, Bungalow/Craftsman, 2-story, stuccoed house, side-gable-roofed with shed-dormer, shed-roofed porch with stuccoed, square posts, arched spans between posts, paired windows, sidelights and transom  
Metal Shed, NC
- 2820 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, shed-roofed porch with Tuscan columns on brick piers, paired windows, sidelights and transom  
Wood Shed, NC
- 2822 1920s, Bungalow/Craftsman, 2-story, stuccoed house, side-gable-roofed with shed-dormer, exposed rafters, shed-roofed porch with Tuscan columns on brick piers, decorative glazing, paired windows, transom and sidelights  
Metal Garage/Carriage House

**Edgewood Avenue**  
**2800 Block (Odd)**

- 2801 1920s, Colonial Revival, 2-story, frame house with wood shingles and weatherboard, hip-roofed with hip-roofed dormer, exterior-side chimney, hip-roofed porch with tapered posts, paired windows, sidelights and transom  
Metal Garage/Carriage House
- 2803 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, exterior-side chimney, hip-roofed porch tapered brick piers, paired windows, transom and sidelights  
Metal Garage/Carriage House

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 17

Battery Court Historic District (127-5897)  
Richmond, VA

- 2803 1/2 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, exterior-side chimney, hip-roofed porch with brick posts on tapered brick piers, paired windows, transom and sidelights  
Metal Garage/Carriage House
- 2805 1920s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, interior-side chimney, wraparound porch with fluted, tapered columns, turned balustrade, tripartite window with fanlight, transom and sidelights
- 2807 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with 2 wall dormers, interior end chimney, hip-roofed porch with square posts, arched span between posts  
Metal Garage, NC
- 2809 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with 2 wall dormers, hip-roofed porch with stuccoed posts, arched span between posts  
Metal Garage
- 2811 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with wall dormers, hip-roofed porch with square posts
- 2813 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with 2 wall dormers, hip-roofed porch with square posts  
Wood Shed, NC
- 2815 1920s, Colonial Revival, 2-story, a six-course American bond brick house, hip-roofed, interior-side chimney, hip-roofed porch with square, paneled posts  
Wood Garage, NC
- 2817 1920s, Colonial Revival, 2-story, frame house, hip-roofed with 2 gabled dormers, 2 interior-side chimneys, hip-roofed porch with square, fluted columns, turned balustrade, tripartite window, decorative glazing
- 2819 1920s, Bungalow/Craftsman, 2-story, stuccoed house with aluminum siding, gable-roofed with projecting gabled-bay, shed-roofed porch with colonettes on stuccoed piers  
Metal Shed
- 2821 1920s, Bungalow/Craftsman, 2-story, stuccoed house with wood shingles, gable-roofed with projecting gabled-bay, shed-roofed porch with colonettes on stuccoed piers  
Stucco Row of Garages

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 18

---

Battery Court Historic District (127-5897)  
Richmond, VA

**Edgewood Avenue**

2900 Block (Even)

- 2900 1920s, Colonial Revival, 2-story, frame house, hip-roofed with cross-gable and hip-roofed dormer, interior-side chimney, hip-roofed porch with square fluted columns, turned balustrade, ribbon window, decorative glazing, sidelights and transom
- 2902 1910s, Bungalow/Craftsman, 2-story, stuccoed house, side-gable-roofed with gable-roofed dormer, exposed rafters, eaves brackets, casement windows, shed-roofed porch with square brick posts  
Stucco Garage
- 2906 1920s, Colonial Revival, 2-story, frame house, hip-roofed with cross-gables and pedimented-dormer, central interior chimney, hip-roofed porch with paired Ionic columns on rusticated block piers, turned balustrade, decorative glazing, tripartite window, sidelights and transom
- 2908 1920s, Bungalow/Craftsman, 2-story, frame house, side-gable-roofed with front-gabled dormer, eaves brackets, shed-roofed porch with paired Tuscan columns on brick piers, sidelights and transom  
Metal Garage
- 2912 1920s, Bungalow/Craftsman, 2-story, frame house, hip-roofed with hip-roofed dormer, overhanging eaves, exposed rafters, central interior chimney, hip-roofed porch with paired square posts on brick piers, bracketed sills, tripartite window, sidelights and transom  
Metal Garage
- 2914 1910s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormers, 2 exterior side rusticated block chimneys, hip-roofed porch with square posts, turned balustrade, pediment entry-bay, decorative glazed windows, sidelights and transom  
Stucco Garage/Carriage House
- 2916 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with cross-gables, interior-side chimney, hip-roofed porch with Tuscan columns, turned balustrade, paired windows, sidelights and transom  
Metal Shed, NC

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 19

Battery Court Historic District (127-5897)  
Richmond, VA

**Edgewood Avenue**

2900 Block (Odd)

- 2901 1910s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, interior-side chimney, shed-roofed porch with Tuscan columns, transom and sidelights  
Outbuilding demolished as of 2003
- 2903 1910s, Colonial Revival, 2-story, stuccoed house, side-gable-roofed, brick stoop with iron railing, paired windows
- 2905 1910s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, central interior chimney, hip-roofed porch with pedimented entry-bay, Tuscan columns, and turned balustrade, paired windows, transom and sidelights  
Stucco Garage
- 2907 1920s, Bungalow/Craftsman, 2-story, frame house, hip-roofed gabled roof dormer, eaves brackets, shed-roofed porch with Tuscan columns, paired windows
- 2909 1910s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, eaves brackets, hip-roofed porch with Ionic columns, paired and tripartite windows, transom and sidelights  
Metal Garage/ Carriage House
- 2911 1910s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, hip-roofed porch with fluted Tuscan columns, paired and tripartite windows, transom and sidelights  
Stucco Row of Garages
- 2913 1920s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, hip-roofed porch with tapered posts on brick piers, paired and tripartite windows, transom and sidelights
- 2915 1920s, Bungalow/Craftsman, 2-story, stretcher bond brick house, hip-roofed, hip-roofed wraparound porch with square brick posts, paired and tripartite windows, transom and sidelights  
Brick Garage, NC
- 2917 1910s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, eaves brackets, hip-roofed porch with paneled square columns, paired and tripartite windows, transom and sidelights  
Vinyl/Stucco Garage, NC

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 20

Battery Court Historic District (127-5897)  
Richmond, VA

- 2919 1910s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, interior-side chimney, wraparound porch with Tuscan columns and turned balustrade, paired and tripartite window, transom and sidelight

**Fendall Avenue**  
2300 Block (Odd)

- 2307 1930s, Colonial Revival, 2-story, stuccoed house, hip-roofed, 2 interior chimneys, 2-story porch with square posts
- 2311 1920s, Bungalow/Craftsman, 1-story, stuccoed house, gable-roofed with gabled dormer, interior chimney, wraparound porch with square stuccoed posts, transom

Stucco Carriage House

**Fendall Avenue**  
2600 Block (Odd)

- 2601 Lee H. Hazelwood Residence, 1920s, Colonial Revival, 2-story, frame house, hip-roofed with cross-gables, side-exterior chimney, hip-roofed porch with an pedimented entry-bay and square fluted ionic columns, dentils, turned balustrade, transom and sidelights  
Metal Garage
- 2603 1920s, Colonial Revival, 2-story, frame house, hip-roofed with cross-gables, side-exterior chimney, hip-roofed porch with pedimented entry-bay with square ionic columns, dentils, turned balustrade, transom and sidelights  
Stucco Garage
- 2605 1910s, Colonial Revival, 2-story, six-course American bond brick house, hip-roofed with gable wall dormers, interior-side chimney, shed-roofed porch with pedimented entry-bay with ionic columns, dentils, turned balustrade, transom and sidelights  
Metal Garage
- 2607 1920s, Bungalow/Craftsman, 2-story, frame house, side-gable-roofed with shed dormer, shed-roofed porch with tapered posts, turned balustrade, transom and sidelights
- 2609 1920s, Bungalow/Craftsman, 2-story frame house, side-gable-roofed with gabled dormer, central interior chimney, shed-roofed porch with Tuscan columns on stuccoed piers  
Metal Garage
- 2611 1920s, Colonial Revival, 2-story, frame house with brick-tex siding, hip-roofed with shed dormer, decorative glazing, hip-roofed porch with Tuscan columns, transom and sidelights

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 21

Battery Court Historic District (127-5897)  
Richmond, VA

Asbestos Shed

- 2613 1920s, Colonial Revival, 2-story, frame house, hip-roofed with cross-gables, 2 interior chimneys, hip-roofed porch with Tuscan columns, turned balustrade, lunette window, transom and sidelights
- 2615 1910s, Bungalow/Craftsman, 2-story, stuccoed house with wood shingles, side-gable with gabled dormer with exposed rafters, central interior chimney, paired windows, decorative glazing, shed-roofed porch with Tuscan columns on stuccoed piers

Stucco Garage

**Graham Road, West**  
00 Block (Even)

- 8 1920s, Bungalow/Craftsman, 2-story, stuccoed house, side-gable-roofed, gabled dormer with exposed rafters, interior-side chimney, paired windows, shed-roofed porch with tapered stuccoed piers
- Stucco Garage/Carriage House
- 10 1920s, Bungalow/Craftsman, 2-story, stuccoed house, side-gable-roofed with gabled dormer with exposed rafters, interior-side chimney, paired windows, shed-roofed porch with tapered stuccoed piers, spans between piers are arched
- Wood Shed, NC
- 12 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with gabled dormer with a shingle facade, interior-side chimney, tripartite windows, hip-roofed porch with Tuscan columns on stuccoed piers, transom and sidelights

**Graham Road, West**  
00 Block (Odd)

- 5 1920s, Colonial Revival, 2-story, frame house, hip-roofed with cross-gables, 2 interior-side chimneys, hip-roofed porch with an entry pediment with square posts on brick pier, transom and sidelights
- 7 1920s, Colonial Revival, 2-story, frame house, hip-roofed with cross-gables, 2 interior-side chimneys, hip-roofed porch with an entry pediment with square posts on brick piers, turned balustrade, transom and sidelights

**United States Department of Interior**  
National Park Service

**National Register of Historic Places**  
**Continuation Sheet**

Section number   7   Page   22  

---

Battery Court Historic District (127-5897)  
Richmond, VA

**Graham Road, West**

100 Block (Even)

- 100 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer and exposed rafters, hip-roofed porch with tapered posts on brick piers, transom and sidelights  
Stucco Garage
- 102 1920s, Colonial Revival, 2-story, frame house, hip-roofed with cross gables, 2 rusticated block interior chimneys, hip-roofed porch with square fluted Ionic columns, turned balustrade, projecting pedimented entry-bay, transom and sidelights, diamond paned windows, oval window  
Metal Garage
- 104 1910s, Bungalow/Craftsman, 2-story, stuccoed house, front-gable roof with overhanging eaves and brackets, interior-side chimney, paired windows, gable-front, one-bay entry porch with wood brackets, multi-light transom and sidelights, timber belt-course  
Vinyl Sided Workshop, NC
- 106 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormers, interior-side chimney, hip-roofed porch with Tuscan columns, transom and sidelights  
Metal Shed
- 108 1910s, Colonial Revival, 2-story, stuccoed house, hip-roofed with pedimented-dormer with decorative glazed windows, interior-side chimney, wraparound porch with pedimented-entry bay and Tuscan columns, turned balustrade, transom and sidelights  
Stucco Garage/Carriage House

**Graham Road, West**

100 Block (Odd)

- 101 1920s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, central interior chimney, wraparound porch with Ionic columns on rusticated block piers, turned balustrade, windows with decorative glazing, transom and sidelights  
Wood Shed, NC
- 103 1920s, Bungalow/Craftsman, 2-story, stuccoed house, side-gable-roofed with shed dormer, interior-side chimney, shed-roofed porch with tapered brick, transom and sidelights  
Wood Shed, NC

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 23

Battery Court Historic District (127-5897)  
Richmond, VA

- 105 1910s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, eaves brackets, interior-side chimney, hip-roofed porch with Ionic columns rusticated block piers, turned balustrade, projecting bay with tripartite window, transom and sidelights

**Graham Road, West**

200 Block (Even)

- 200 1960s, **NC**
- 202 1920s, Colonial Revival, 2-story, stretcher bond with multi-colored brick row house, mansard roof with gable wall dormer, interior-side chimney, stepped parapets, shed-roofed porch with Tuscan columns on brick piers, transom and one sidelight
- Metal Garage
- 204 1920s, Colonial Revival, 2-story, Flemish brick bond brick row house, mansard roof with three-part dormer, interior-side chimney, stepped parapets, simple cornice, hip-roofed porch with Tuscan, transom and one sidelight
- 206 1920s, Colonial Revival, 2-story, Flemish bond with multi-colored brick row house, mansard roof with gable wall dormer, interior-side chimney, stepped parapets, shed-roofed porch with Tuscan columns on brick piers, transom and one sidelight
- 208 1910s, Colonial Revival, 2-story, Flemish brick bond brick row house, mansard roof with three-part dormer, interior-side chimney, stepped parapets, simple cornice, hip-roofed porch with Tuscan columns, transom and one sidelight
- 210 1910s, Colonial Revival, 2-story, stretcher bond brick row house, mansard roof with gable wall dormer, interior-side chimney, stepped parapets, shed-roofed porch with Tuscan columns on brick piers, transom and one sidelight
- Brick Garage
- 212 1910s, Colonial Revival, 2-story, Flemish brick bond brick row house, mansard roof with three-part dormer, interior-side chimney, stepped parapets, cornice with dentils and modillions, hip-roofed porch with Tuscan columns, transom and one sidelight
- 214 1910s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, interior-side chimney, hip-roofed porch with Ionic columns, transom
- Metal Shed
- 216 1920s, Colonial Revival, 2-story, frame house with brick-tex siding, hip-roofed with hip-roofed dormer, central interior chimney, hip-roofed porch with Tuscan columns, turned balustrade, tripartite window, transom

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 24

Battery Court Historic District (127-5897)  
Richmond, VA

- 218 1920s, Colonial Revival, 2-story, frame house with brick-tex siding, hip-roofed with hip-roofed dormer with diamond paned windows, exterior-side chimney, hip-roofed porch with Tuscan columns, turned balustrade, tripartite window with fanlight, transom and sidelights  
Metal Garage, NC
- 220 1910s, Bungalow/Craftsman, 2-story, frame house, side-gable-roofed with eaves brackets and gabled dormer, interior-side chimney, shed-roofed porch with tapered brick piers, transom and sidelights  
Wood Shed, NC
- 222 1910s, Colonial Revival, 2-story, frame house, hip-roofed, exterior-side chimney, hip-roofed with Tuscan columns on brick piers, transom and sidelights  
Vinyl Sided Garage, NC

Graham Road, West  
200 Block (Odd)

- 201 Albert Norrell School Annex, 1954, Moderne, one and 2-story, brick school, covered entry with steel posts NC

Graham Road, West  
600 Block (Even)

- 602 1955, NC
- 604 1959, NC
- 606 1955, NC; Vinyl Sided Garage, NC
- 608 1920s, Colonial Revival, 2-story, Flemish bond brick house, hip-roofed with hip-roofed dormer, interior-side chimney, hip-roofed porch with tapered posts on brick, paired windows, transom
- 610 1940s, Colonial Revival, 2-story, six-course American brick bond brick house, side-gable-roofed, exterior-side chimney, entry porch with bell-cast roof and modern wrought modern wrought iron posts (2 buildings)
- 614 A&B 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, interior-side chimney, hip-roofed porch with Tuscan columns, three tripartite windows, transom and sidelights
- 616 1920s, Bungalow/Craftsman, 2-story, stuccoed house, side-gable-roofed with gabled dormer, shed-roofed porch with square brick posts  
Concrete Block Garage/Carriage House
- 618 1940s, Bungalow/Craftsman, 2-story, frame house, side-gable-roofed with 2 gabled dormers, central interior chimney, shed-roofed porch with modern wrought iron posts  
Asbestos Garage, NC

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 25

Battery Court Historic District (127-5897)  
Richmond, VA

- 620 1940s, Bungalow/Craftsman, 2-story, frame house, side-gable-roofed with 2 gabled dormers, shed-roofed porch with tapered posts on brick piers
- 622 1920s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, central interior chimney, wraparound porch rusticated block posts on piers

**Graham Road, West**

600 Block (Odd)

- 605 1965, **NC**; Outbuilding demolished as of 2003
- 607 1920s, Bungalow/Craftsman, 2-story, frame house, hip-roofed with hip-roofed dormer with exposed rafters, shed-roofed porch with square posts  
Metal Shed, **NC**
- 609 1956, **NC**
- 611 1920s, Bungalow/Craftsman, 2-story, stretcher bond brick house, side-gable-roofed with gabled dormer, interior-side chimney, porch with tapered posts on brick piers  
Metal Shed, **NC**
- 613 1920s, Bungalow/Craftsman, 2-story, eight-course American bond brick house, hip-roofed with hip-roofed dormer with exposed rafters, interior chimney, hip-roofed porch with tapered brick  
Brick Workshop
- 617 1940s, Colonial Revival, 2-story, six-course American bond brick house, side-gable-roofed, exterior-side chimney, brick stoop with an iron railing, pedimented architrave
- 619 1940s, Colonial Revival, 2-story, six-course American bond brick house, side-gable-roofed, exterior-side chimney, brick stoop with iron railing, pilasters and projecting cornice at entry
- 621 1930s, Bungalow/Craftsman, 2-story, six-course American bond brick house, hip-roofed with a hip-roofed dormer with exposed rafters, interior-side chimney, hip-roofed porch with paired square posts with Chinese-style lattice-work in between
- 623 1920s, Bungalow/Craftsman, 2-story, seven-course American bond brick house, hip-roofed with hip-roofed dormer, interior-side chimney, hip-roofed porch with paired square posts  
Concrete Block Garage/Carriage House
- 625 1920s, Bungalow/Craftsman, 2-story, six-course American bond brick house, hip-roofed with hip-roofed dormer with exposed rafters, interior-side chimney, hip-roofed porch with paired square posts

**United States Department of Interior**  
National Park Service

**National Register of Historic Places**  
**Continuation Sheet**

Section number 7 Page 26

Battery Court Historic District (127-5897)  
Richmond, VA

- 627 1920s, Bungalow/Craftsman, 2-story, frame house, side-gable-roofed with gabled dormer with exposed rafters, side-exterior chimney, shed-roofed porch with modern wrought iron post
- 629 1930s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, central interior chimney, hip-roofed porch with fluted Tuscan columns on brick piers

**Graham Road, West**

800 Block (Odd)

- 801 1930s, Colonial Revival, 2-story, stuccoed house, side-gable-roofed with 2 shed dormers, exterior side chimney, shed-roofed porch with tapered brick piers
- 803 1920s, Bungalow/Craftsman, 2-story, frame house, side-gable-roofed with shed dormer, shed-roofed porch with tapered posts  
Metal Garage

**Greenwood Avenue**

2300 Block (Even)

- 2304 1910s, Colonial Revival, 2-story, frame house, hip-roofed with cross-gables, hip-roofed dormer, 2 interior chimneys, decorative glazing, hip-roofed porch (columns and balustrade, removed), transom and sidelights
- 2306 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with cross-gables, hip-roofed dormer, 2 interior chimneys, decorative glazing, hip-roofed porch with pedimented entry-bay and square posts, transom and sidelights  
Asphalt Sided Garage/Carriage House

**Griffin Avenue**

2700 Block (Even)

- 2702 1910s, Queen Anne, 2-story, frame house, cross-gable roof, hip-roofed porch with turned posts and brackets, turned balustrade, tripartite window, transom
- 2706 1920s, Colonial Revival, 2-story, frame house, hip-roofed, interior-side chimney, hip-roofed porch with Tuscan columns, paired windows, transom and sidelights
- 2708 1920s, Bungalow/Craftsman, 2-story, stuccoed house, side-gable-roofed with full-facade shed-dormer, exposed rafters, interior-side chimney, shed-roofed porch with Tuscan columns, transom and sidelights  
Concrete Block Garage, NC

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 27

Battery Court Historic District (127-5897)  
Richmond, VA

- 2712 1920s, Bungalow/Craftsman, 2-story, stuccoed house, side-gable-roofed, interior-side chimney, shed-roofed porch with tapered stuccoed piers, arched span between piers, paired windows, sidelights  
Stucco Garage
- 2714 1920s, Colonial Revival, 2-story, frame house, side-gable-roofed interior-side chimney, shed-roofed porch with square posts, transom and sidelights  
Metal Garage, NC
- 2718 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed porch with Tuscan columns, turned balustrade, transom and sidelights
- 2720 1920s, Bungalow/Craftsman, 2-story, frame house with brick-tex siding, side-gable-roofed, shed-roofed porch with Tuscan columns, tripartite and paired windows
- 2722 1920s, Bungalow/Craftsman, 2-story, frame house with vinyl siding and PermaStone, hip-roofed with 2 wall dormers, interior-side chimney, hip-roofed porch with sided piers, paired windows, transom
- 2724 1920s, Bungalow/Craftsman, 2-story, frame house, hip-roofed with 2 wall dormers, interior-side chimney, hip-roofed porch with sided piers, paired windows, transom

**Griffin Avenue**  
2800 Block (Even)

- 2800 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with 2 gabled-wall dormers, overhanging eaves, interior-side chimney, hip-roofed porch with square posts  
Metal Garage/Carriage House
- 2802 1930s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with 2 gabled-wall dormers, overhanging eaves, interior-side chimney, hip-roofed porch stuccoed posts, arched spans between posts
- 2804 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with 2 gabled-wall dormers, overhanging eaves, interior-side chimney, and hip-roofed porch with square posts
- 2806 1930s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with 2 gabled wall dormers, overhanging eaves, interior-side chimney, hip-roofed porch with stuccoed posts, arched spans between posts  
Metal Garage, NC
- 2810 1910s, Late Victorian, 2-story, frame house, shed-roofed, bracketed cornice, center projecting tower with cross-gabled-roof, hip-roofed porch with turned posts, brackets and turned balustrade, paired windows, floor-to-ceiling windows, transom

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 28

Battery Court Historic District (127-5897)  
Richmond, VA

**Metal Shed, NC**

- 2812 1910s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, central interior chimney, hip-roofed porch with tapered posts, transom
- Concrete Block Shed, NC**
- 2814 1910s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer with windows, hip-roofed porch with tapered stuccoed posts, transom
- Outbuilding demolished as of 2003
- 2816 1910s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, hip-roofed porch with sided tapered posts, transom
- 2818 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, hip-roofed porch with tapered posts, transom
- 2820 1920s, Colonial Revival, 2-story, frame house, hip-roofed with gabled-dormer, eaves brackets, hip-roofed porch with fluted Ionic columns, turned balustrade, Palladian window, paired windows, tripartite window, transom and sidelights
- 2822 1920s, Colonial Revival, 2-story, frame house, hip-roofed with gabled dormer, hip-roofed porch with pedimented entry-bay and square, fluted, Ionic columns, Palladian window, paired windows, tripartite window, transom and sidelights
- Metal Garage**
- 2824 1920s, Colonial Revival, 2-story, frame house, hip-roofed with gabled-dormer, hip-roofed porch with columns and modern wrought iron supports, Palladian window, paired windows, tripartite window transom and sidelights
- 2826 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, eaves brackets, hip-roofed porch with columns on brick piers, paired windows, transom and sidelights
- Concrete Block Shed, NC**

**Griffin Avenue**

**2900 Block (Even)**

- 2900 1920s, Bungalow/Craftsman, 2-story, six-course American bond brick house, jerkinhead-roofed with jerkinhead dormer, exposed rafters, interior-side chimney, shed-roofed porch with tapered brick piers, paired windows, sidelights
- 2 Wood Sheds, 2 NC**
- 2902 1910s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, interior-side chimney, hip-roofed porch with paneled square posts on brick piers, turned balustrade, paired windows, transom
- Wood Shed, NC**
- 2904 1920s, Colonial Revival, 2-story, frame house, side-gable-roofed has 2 pedimented dormers with ribbon windows, hip-roofed porch with fluted Tuscan columns on brick piers. The front door features a transom and sidelights

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 29

Battery Court Historic District (127-5897)  
Richmond, VA

Concrete Block Garage, **NC**

- 2908 1920s, Bungalow/Craftsman, 2-story, stretcher bond brick house, side-gable-roofed with shed dormer, exposed rafters, interior-side chimney, hip-roofed porch with tapered posts on brick piers, paired window, transom and sidelights
- 2910 1910s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, interior-side chimney, hip-roofed porch with square posts and turned balustrade, tripartite window, transom and sidelights
- 2912 1950s, **NC**; Vinyl Shed, **NC**
- 2914 1980s, **NC**
- 2916 1910s, Colonial Revival, 2-story, frame house, hip-roofed with gabled dormer, hip-roofed porch with Tuscan columns and turned balustrade, Palladian window, tripartite window, transom and sidelights
- 2918 1920s, Colonial Revival, 2-story, frame house, gable roof, 2 interior-side chimneys, porch with tapered posts on paneled piers and turned balustrade, paired windows
- 1 ½ Story Workshop/Carriage House

**Hawthorne Avenue**  
2300 Block (Even)

- 2310 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed, central interior chimney, Hip-roofed porch with Tuscan colonettes on paneled piers, transom and sidelights
- 2312 Outbuilding, **NC**  
1920s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, interior-side chimney, concrete slab stoop pedimented hood with brackets and modern wrought iron railing
- 2314 Outbuilding, **NC**  
1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with gabled dormer, exposed rafters, interior-side chimney, shed-roofed porch with tapered posts on tapered brick piers, transom and sidelights
- 2316 1920s, Bungalow/Craftsman, 2-story stuccoed house, cross-gable roof with 2 shed dormers, exposed rafters, interior-side chimney, tripartite window, half-timbered, wraparound porch with tapered brick piers, roof, paired windows

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 30

Battery Court Historic District (127-5897)  
Richmond, VA

**Hawthorne Avenue**

2400 Block (Even)

- 2400 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, interior-side chimney, wraparound porch with Tuscan columns, tripartite window, sidelights and transom
- 2402 1920s, Bungalow/Craftsman, 2-story, stretcher bond brick house, hip-roofed with hip-roofed dormer, exposed eaves, interior-side chimney, one-bay porch with wrought iron supports, paired windows, sidelights and transom  
Glass Greenhouse, **NC** and Row of Concrete Block Garages
- 2404 1920s, Bungalow/Craftsman, 2-story, stuccoed house, gable-roofed, shed-roofed porch with stuccoed posts on brick piers, paired windows
- 2406 1930s, Colonial Revival, 2-story, six-course American bond brick house, side-gable-roofed, interior-side chimney, shed-roofed porch with modern wrought iron supports and balustrade
- 2408 1940s, Colonial Revival, 2-story, six-course American bond brick house, side-gable-roofed with 2 gabled dormers, side-exterior chimney, pilasters and entablature at entry  
Brick Shed, **NC**
- 2410 1930s, Bungalow/Craftsman, 2-story, six-course American bond brick house, jerkinhead-roofed with hip-roofed dormer, side-exterior chimney, shed-roofed porch with Tuscan columns on brick piers
- 2412 1930s, Colonial Revival, 2-story, six-course American bond brick house, side-gable-roofed, portico with wood posts and a broken pediment, exterior-side chimney, modillioned cornice, transom, side porch with square columns and roof balustrade
- 2416 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer with wood shingles, interior-side chimney, hip-roofed wraparound porch with tapered stuccoed posts, decorative glazing, tripartite window with fanlight, sidelights and a transom  
Metal Garage

**Hawthorne Avenue**

2500 Block (Even)

- 2500 1940s, Colonial Revival, 2-story, six-course American bond brick house, side-gable-roofed, interior-side chimney, portico with Tuscan columns and pediment with cornice return and dentils, fanlight  
Wood Shed, **NC**
- 2502 1920s, Colonial Revival, 2-story, six-course American bond brick house, gable roof, interior-side chimney, pilasters and broken pediment at entry

**United States Department of Interior**  
National Park Service

**National Register of Historic Places**  
**Continuation Sheet**

Section number   7   Page   31  

Battery Court Historic District (127-5897)  
Richmond, VA

- 2504-A&B     1920s, Colonial Revival, 2-story, stretcher bond brick house, hip-roofed, central interior chimney, pilasters and pediment at entry
- 2506           1920s, Tudor Revival, 2-story, brick and stuccoed house with half-timbering, gable-roofed, exterior-facade chimney  
                    Stucco Garage
- 2508           1954, **NC**; Brick Garage, **NC**
- 2510           1940s, Colonial Revival, 2-story, six-course American bond brick house, gable roof with 2 gable roof dormers, exterior-side chimney, pilasters and entablature at entry  
                    Concrete Block Garage, **NC**

**Hawthorne Avenue**

2600 Block (Even)

- 2600           No Main House; Brick Garage
- 2602           1920s, Colonial Revival, 2-story, frame and stretcher brick house, gambrel-roofed with full-width shed-dormer, interior-side chimney, tripartite window, brick stoop, pilasters and pediment at entry  
                    Metal Shed, **NC**
- 2604           1920s, Spanish Mission, 2-story, stuccoed house, hip-roofed, overhanging eaves, central interior chimney, planters below second story windows, ribbon window, 1-story wings both sides with arches and pergola  
                    Metal Shed, **NC**
- 2606           1930s, Colonial Revival, 2-story, frame and Flemish bond brick house, side-gable-roofed with and three gable wall dormers, 2 interior-side chimneys  
                    Wood Shed, **NC** and Brick Garage
- 2608           1940s, Colonial Revival, 2-story, five-course American bond brick house, gable roof with three gabled dormers, interior-side chimneys, pedimented entry porch with square posts  
                    Metal Shed, **NC**

**Hawthorne Avenue**

2800 Block (Even)

- 2800           1920s, Colonial Revival, 2-story, frame and stretcher bond brick house, gambrel-roofed with full-facade shed dormer, exterior-facade chimney, 1-story projecting entry-bay with jerkinhead roof, fanlight  
                    Wood Garage/Carriage House

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 32

Battery Court Historic District (127-5897)  
Richmond, VA

- 2802 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, exposed rafters, central interior chimney, hip-roofed porch with tapered posts on brick piers, paired windows, transom and sidelights
- 2804 1920s, Bungalow/Craftsman, 2-story stuccoed house, side-gable-roofed with shed dormer, interior-side, shed-roofed porch with stuccoed square brick piers, arched spans between piers
- 2806 1930s, Colonial Revival, 2-story, frame house, side-gable-roofed interior-side chimney, hip-roofed porch with Tuscan columns  
Wood Shed, NC
- 2808 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, central interior chimney, hip-roofed porch with columns on brick piers, transom  
Metal Garage
- 2810 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with gabled dormer, exposed rafters, 2 interior-side chimneys, hip-roofed porch with columns on stuccoed piers, tripartite windows, transom
- 2812 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, exposed rafters, hip-roofed porch with square posts, tripartite windows, sidelights  
Stucco/Wood Garage/Carriage House
- 2814 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, exposed rafters, exterior-side chimney, hip-roofed porch with Tuscan columns, transom and sidelights  
Wood Shed, NC
- 2818 1910s, Bungalow/Craftsman, 2-story, stuccoed house, side-gable-roofed with shed dormer, exposed rafters, interior-side chimney, shed-roofed porch with fluted Tuscan columns, turned balustrade, transom  
Metal Shed and Wood Shed and Metal Carport, 3 NC
- 2820 1920s, Colonial Revival, 2-story, six-course American bond brick house, side-gable-roofed, exterior-side chimney, pedimented portico with fluted Tuscan columns, side shed-roofed porch with fluted Tuscan columns, paired windows, a fanlight and sidelights  
Concrete Block Row of Garages and Metal/Wood Row of Garages
- 2822 1930s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with 2 hip-roofed dormers, eaves brackets, 2 interior-side chimneys, wraparound porch with square stuccoed posts, transom and sidelights  
One Outbuilding, NC, and Stucco/Wood Garage

**United States Department of Interior**  
National Park Service

**National Register of Historic Places**  
**Continuation Sheet**

Section number 7 Page 33

---

Battery Court Historic District (127-5897)  
Richmond, VA

- 2824 1930s, Colonial Revival, 2-story, stretcher bond brick house, hip-roofed with hip-roofed dormer, a interior-side chimney, modillioned cornice, hip-roofed porch with Tuscan columns, tripartite windows with transoms, transom  
Wood Garage

**Hawthorne Avenue**  
**2800 Block (Odd)**

- 2801 1920s, Colonial Revival, 2-story, frame house, hip-roofed, hip-roofed porch with Tuscan columns, tripartite window, transom and sidelights  
Outbuilding demolished as of 2003
- 2803 1920s, Colonial Revival, 2-story, frame house, side-gable-roofed with 2 gabled dormers, one interior side chimney, hip-roofed porch with Tuscan columns on brick piers, paired windows, transom and sidelights
- 2805 1920s, Bungalow/Craftsman, 2-story, frame house, hip-roofed with hip-roofed dormer, paired brackets, 2 interior side chimneys, hip-roofed porch with paired square columns, arched spans between columns, paired windows, transom and sidelights  
Brick Garage
- 2807 1920s, Colonial Revival, 2-story, stuccoed house, side-gable-roofed with 2 gabled dormers, central interior chimney, shed-roofed porch with modern wrought iron posts, paired windows, transom  
Stucco Garage
- 2809 1920s, Colonial Revival, 2-story, frame house, gambrel-roofed with full-width shed-dormer, interior-side chimney, wraparound hip-roofed porch with sided square posts covered, transom
- 2811 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, paired brackets, 2 interior side chimneys, hip-roofed porch with Tuscan columns, paired windows, tripartite window, transom and sidelights  
Stucco/Wood Garage/Carriage House
- 2813 1920s, Bungalow/Craftsman, 2-story, stuccoed house with wood shingles, hip-roofed with gable roof dormer, exposed rafters, 2 interior side chimneys, wraparound hip-roofed porch with square posts  
Stucco/Wood Garage/Carriage House
- 2815 1920s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, interior-side chimney, hip-roofed porch with tapered posts on brick piers, paired windows, tripartite windows, transom and sidelights
- 2817 1920s, Colonial Revival, 2-story, brick house, hip-roofed with hip-roofed dormer, interior-side chimney, hip-roofed porch with Tuscan columns on brick piers, paired windows, tripartite windows, sidelights

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 34

Battery Court Historic District (127-5897)  
Richmond, VA

Brick Garage/Carriage House

**Hawthorne Avenue**  
**2900 Block (Even)**

- 2900 1910s, Colonial Revival, 2-story, six-course American bond brick house, side-gable-roofed with 2 hip-roofed dormers, interior-side chimney, wraparound porch with Tuscan columns on brick piers and turned balustrade, transom and sidelights
- 2902 1910s, Bungalow/Craftsman, 2-story, frame house, hip-roofed with gabled dormer, interior-side chimney, shed-roofed porch with Tuscan columns, tripartite window, transom and sidelights  
Stucco/Wood Garage
- 2904 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, interior-side chimney, hip-roofed porch with exposed rafters and tapered paneled posts on brick piers, paired windows, transom and sidelights  
Metal Garage
- 2908 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, interior-side chimney, hip-roofed, wraparound porch with Tuscan columns on stuccoed piers, transom and sidelights  
Stucco/Wood Garage/Carriage House
- 2910 1920s, Bungalow/Craftsman, 2-story, frame house, hip-roofed with hip-roofed dormer, eaves brackets, interior-side chimney, hip-roofed porch with tapered posts on stuccoed piers, tripartite windows, transom
- 2912 1920s, Colonial Revival, 2-story, frame and stretcher bond brick house, side-gable-roofed with full-facade shed dormer, exterior-facade chimney, stoop with pedimented hood  
Stucco/Wood Garage/Carriage House
- 2914 R. P. Eubank Residence, 1920s, Colonial Revival, 2-story, stuccoed house, gambrel-roofed with shed dormer, exterior-side chimney, shed-roofed porch with modern wrought iron posts, sidelights
- 2916 1940s, Colonial Revival, 2-story, stretcher bond brick house, side-gable-roofed with 2 gabled dormers, side-exterior chimney, brick stoop projecting gabled-entry bay, pilasters and pediment at entry
- 2918 1930s, Colonial Revival, 2-story, stuccoed house, gambrel-roof with shed dormer, interior-side chimney, shed-roofed porch with pedimented entry-bay and paneled posts, paired windows, transom and sidelights
- 2920 1930s, Colonial Revival, 2-story, stuccoed house, gambrel-roofed with shed dormer, exterior-side chimney, shed-roofed porch with tapered stone piers

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 35

---

Battery Court Historic District (127-5897)  
Richmond, VA

- 2922 1960s, **NC**  
2924 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, overhanging eaves, 2 interior-side chimneys, hip-roofed entry porch with stuccoed columns on brick piers, paired windows, transom and sidelights  
2926 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, overhanging eaves, 2 interior-side chimneys, hip-roofed entry porch with stuccoed columns on brick piers, paired windows, transom and sidelights  
2928 Stucco/Wood Garage, **NC**  
1920s, Colonial Revival, 2-story, stuccoed house, side-gable-roofed with 2 gabled dormers, interior chimney, shed-roofed porch is square posts on stuccoed piers, paired windows, transom  
2932 Fire Station No. 14, 1990s, **NC**

**Hawthorne Avenue**  
2900 Block (Odd)

- 2901 1930s, Colonial Revival, 2-story, frame house, side-gable-roofed, interior-side chimney, pedimented entry porch with Tuscan columns  
Wood Garage/Carriage House  
2903 1930s, Colonial Revival, 2-story, frame house with wood shingles and weatherboard, gambrel-roof with full-width shed-dormer, interior-side chimney, paired windows, pedimented portico with Tuscan columns, fanlight  
Wood Garage/Carriage House  
2911 Meverell B. VanDoren Residence, 1910s, Colonial Revival, 2-story, stretcher bond brick house, hip-roofed with hip-roofed dormer, 2 chimneys, wraparound porch with pedimented entry-bay and square paneled posts, stone lintels and sills, sidelights and arched transom, decorative glazing  
Brick Garage  
2913 1910s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, interior-side chimney, wraparound porch with fluted, tapered columns on brick piers, paired windows, transom and sidelights  
Wood Covered Deck, **NC**  
2915 1910s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, interior end chimney, wraparound hip-roofed porch with wood posts on brick piers  
Stucco Garage/Carriage House

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 36

Battery Court Historic District (127-5897)  
Richmond, VA

- 2917 1920s, Colonial Revival, 2-story, stretcher bond brick house, hip-roofed with hip-roofed dormer, hip-roofed porch with Tuscan columns on brick piers, paired windows, tripartite window, transom and sidelights  
Metal Garage/Carriage House
- 2919 1910s, Colonial Revival, 2-story, stuccoed house, side-gable-roofed, eaves brackets and exposed rafters, central interior chimney, shed-roofed porch with Tuscan columns, paired window
- 2921 1920s, Colonial Revival, 2-story, stretcher bond brick house, hip-roofed with hip-roofed dormer, hip-roofed porch with Tuscan columns on brick piers, paired windows, tripartite window, transom and sidelights
- 2923 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, hip-roofed porch with Tuscan columns, tripartite windows, transom and sidelights  
Metal Shed, NC
- 2925 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, overhanging eaves, wraparound porch with Tuscan columns on stuccoed piers  
Stucco Garage/Carriage House
- 2927 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, exposed rafters and overhanging eaves, 2 interior-side chimneys, hip-roofed porch with tapered posts on stuccoed piers  
One Outbuilding, NC, and Stucco Garage

Lancaster Road, West  
00 Block (Even)

- 2 1960s, NC
- 8 1920s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, eaves brackets, interior-side chimney, hip-roofed porch with pedimented entry-bay and tapered posts on brick piers, turned balustrade, windows with arched fanlights, fanlight and sidelights at entry  
Stucco Garage
- 10 1920s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, interior-side chimney, hip-roofed porch with pedimented entry-bay and tapered posts on brick piers, turned balustrade, windows with arched fanlights, fanlight and sidelights at entry  
Metal Garage
- 12 1920s, Colonial Revival, 2-story, Flemish bond brick duplex, side-gable-roofed, 2 wraparound porches with square posts and roof balustrades

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 37

Battery Court Historic District (127-5897)  
Richmond, VA

- 14 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with cross-gables, side-exterior chimney, hip-roofed porch with pediment with Tuscan columns, turned balustrade, transom and sidelights
- 16 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with gabled dormer, wide eaves, side-exterior chimney, hip-roofed porch with pedimented entry-bay with Tuscan columns on rusticated block piers, turned balustrade, transom and sidelights  
Metal Garage

**Lancaster Road, West**  
00 Block (Odd)

- 7 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with gabled dormer, overhanging eaves, interior-side chimney, hip-roofed porch with pedimented entry-bay and Tuscan columns on rusticated block piers, turned balustrade, sidelight  
Metal Garage
- 9 1920s, Bungalow/Craftsman, 2-story, stuccoed house, side-gable-roofed with pedimented dormer, interior-side chimney, hip-roofed porch with stuccoed posts, sidelights
- 11 1920s, Colonial Revival, 2-story, stuccoed, frame house, hip-roofed, 2 interior-side chimneys, brick and concrete stoop with an iron railing, transom and sidelights
- 13 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed, central-interior chimney and a hip-roofed dormer with exposed rafters, hip-roofed porch with paired posts on brick piers, three paired windows, transom and sidelights  
Wood Garage Ruins, **NC**
- 15 1920s, Colonial Revival, 2-story, frame house, hip-roofed with cross-gables, hip-roofed dormer, central-interior chimney, wraparound porch with pedimented entry-bay and fluted Ionic columns, windows with arched fanlights, beveled oval window, transom and sidelights  
Metal Garage

**Lancaster Road, West**  
100 Block (Even)

- 100 1910s, Colonial Revival, 2-story, stuccoed house, hip-roofed with cross-gables, central interior chimney, wraparound porch with Tuscan columns, transom and sidelights

**United States Department of Interior**  
National Park Service

**National Register of Historic Places**  
**Continuation Sheet**

Section number   7   Page   38  

---

Battery Court Historic District (127-5897)  
Richmond, VA

- 102 1910s, Colonial Revival, 2-story, frame house, hip-roofed with cross-gables, hip-roofed dormer, 2 interior, hip-roofed porch with Tuscan columns, turned balustrade, transom and sidelights  
Metal Shed, NC
- 104 1920s, Colonial Revival, 2-story, stuccoed house with Permastone, gambrel-roofed with shed-dormer, side-exterior chimney, stoop with pedimented hood with brackets  
Wood Garage, NC
- 106 1910s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, central interior chimney, hip-roofed porch with pedimented entry-bay with fluted square posts, turned balustrade, tripartite window, decorative glazing, transom and sidelights  
Metal Garage
- 108 1910s, Bungalow/Craftsman, 2-story, stuccoed house, side-gable-roofed with gabled dormers, eaves brackets, central interior chimney, shed-roofed porch with tapered posts on mosaic piers, tripartite window  
Stucco Garage
- 110 1910s, Colonial Revival, 2-story, frame house, hip-roofed with cross-gables with hip-roofed dormer, interior end chimney, decorative glazing, hip-roofed porch with pedimented entry-bay with fluted square ionic columns, turned balustrade, transom and sidelights  
Metal Garage
- 112 1920s, Colonial Revival, 2-story, frame house, hip-roofed with cross-gables, interior end chimney, hip-roofed porch with fluted square posts, turned balustrade, transom and sidelights  
Metal Shed, NC

**Lancaster Road, West**  
**100 Block (Odd)**

- 101 1910s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, central interior chimney, hip-roofed porch with fluted Tuscan columns on stuccoed piers, windows with arched fanlights, tripartite window, transom and sidelights
- 103 1910s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, central interior chimney, hip-roofed porch with Tuscan columns on brick piers, dentiled cornice, windows with arched fanlights, tripartite window, transom and sidelights  
Metal Garage

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 39

Battery Court Historic District (127-5897)  
Richmond, VA

- 105 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with gabled dormer, exposed rafters and eaves brackets, interior end chimney, hip-roofed porch with tapered piers, transom  
Metal Garage/Carriage House
- 107 1920s, Bungalow/Craftsman, 2-story, stuccoed house, jerkinhead-roofed with jerkinhead dormer, exposed rafters, flat-roofed porch with tapered brick piers, arched spans between piers, paired windows, transom  
Metal Garage Ruins, NC
- 109 1910s, Colonial Revival, 2-story, frame house, hip-roofed with cross-gables, 2 interior chimneys, hip-roofed porch with pedimented entry-bay with rusticated block piers, beveled-oval light, transom and sidelights  
Metal Garage
- 111 1910s, Colonial Revival, 2-story, frame house, hip-roofed with gabled dormer, interior side chimney, decorative glazing, decorative woodwork, hip-roofed porch with Tuscan columns, transom and sidelights  
Metal Shed, NC
- 113 1910s, Colonial Revival, 2-story, frame house with Permastone and aluminum siding, hip-roofed with shed dormer, interior chimney, hip-roofed porch with pedimented entry-bay with Tuscan columns, turned balustrade, transom and sidelights  
Metal/Wood Garage
- 117 1910s, Colonial Revival, 2-story, frame house, hip-roofed with shed dormer, interior side chimney, hip-roofed porch with Tuscan columns, turned balustrade, decorative glazing, transom and sidelights  
Metal/Wood Garage
- 119 1920s, Colonial Revival, 2-story, frame house with Permastone and aluminum siding, hip-roofed, exterior side chimney, hip-roofed porch with Tuscan columns, paired windows, transom and sidelights
- 121 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed, exterior side chimney, hip-roofed porch with stuccoed piers, arched span between piers, paired windows, transom and sidelights  
Metal Garage
- 123 1920s, Colonial Revival, 2-story, frame house, hip-roofed, exterior side chimney, hip-roofed porch with Tuscan columns, paired windows, transom and sidelights

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 40

Battery Court Historic District (127-5897)  
Richmond, VA

**Lancaster Road, West**

300 Block (Odd)

- 301 1910s, Queen Anne, 2-story frame house, cross-gable roof, central interior chimney, lunette window, pyramidal tower, wraparound porch with square posts, turned balustrade, tripartite window, transom  
Metal Garage
- 303 1910s, Bungalow/Craftsman, 2-story, stuccoed house, side-gable-roofed with gabled dormer, eaves brackets and exposed rafters, central-interior chimney, shed-roofed porch with paired Tuscan columns on brick piers, tripartite window, transom  
Wood Shed, NC
- 305 1910s, Bungalow/Craftsman, 2-story, stuccoed house, side-gable-roofed with gabled dormer, eaves brackets, side-exterior chimney, shed-roofed porch with paired Tuscan columns on stuccoed piers, turned balustrade, tripartite window, transom  
Stucco Garage, NC
- 307 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with shed dormer, side-exterior chimney, hip-roofed porch with fluted square posts, transom and sidelights
- 309 1910s, Colonial Revival, 2-story, stuccoed house, hip-roofed with cross-gables, central-interior chimney, wraparound porch with pedimented entry-bay and fluted Tuscan columns, transom and sidelights  
Wood Carport, NC
- 311 1910s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, side-exterior chimney, wraparound porch with Tuscan colonettes on stuccoed piers, dentiled-frieze on porch, tripartite windows, transom and sidelights
- 313 1910s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, side-exterior chimney, wraparound porch with Tuscan colonettes on stuccoed piers, dentiled-frieze on porch, tripartite windows, transom and sidelights

**Lancaster Road, West**

600 Block (Even)

- 602 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, interior-side chimney, hip-roofed porch supported by tapered brick piers, arched span between piers, transom and sidelights  
Parged Workshop

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 41

Battery Court Historic District (127-5897)  
Richmond, VA

- 604 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, interior-side chimney, hip-roofed porch supported by tapered stuccoed posts on brick piers, arched span between piers, transom and sidelights
- 606 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, eaves brackets, interior-side chimney, hip-roofed porch supported by tapered brick piers, arched span between piers  
Metal Garage
- 608 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, interior-side chimney, hip-roofed porch supported by tapered posts on brick piers  
Metal Garage
- 610 1920s, Bungalow/Craftsman, 2-story, stuccoed house with Permastone, hip-roofed with hip-roofed dormer, eaves brackets, interior-side chimney, hip-roofed porch supported by tapered brick piers, arched span between piers  
Metal Garage
- 612 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, interior-side chimney, hip-roofed porch supported by Tuscan columns on brick  
Metal Garage/Carriage House
- 614 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, interior-side chimney, hip-roofed porch supported by tapered posts on brick piers  
Metal Garage, NC

**Lancaster Road, West**

600 Block (Odd)

- 613 1940s, Modern, 1-story, six-course American bond brick house, cross-gable roof, sidelight, concrete block stoop
- 615 1930s, Colonial Revival, 2-story, frame house is with Permastone and aluminum siding, hip-roofed with hip-roofed dormer, porch with square brick posts and roof balustrade, transom, gabled-hood with brackets at entry  
Metal Garage
- 617 1920s, Bungalow/Craftsman, 2-story, stuccoed house, jerkinhead roof, interior-side chimney, flat roof porch with square paneled columns, hip-roofed hood with brackets at entry, paired windows  
Concrete Block Garage

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 42

Battery Court Historic District (127-5897)  
Richmond, VA

- 619 1920s, Colonial Revival, 2-story, six-course American bond brick house, hip-roofed with hip-roofed dormer, interior-side chimney, hip-roofed porch with square columns on brick piers, sidelights and transom, three paired windows  
Metal Garage, NC
- 621 1930s, Colonial Revival, 2-story, frame house with wood shingles, hip-roofed with hip-roofed dormer, interior-side chimney, hip-roofed porch with Tuscan columns on brick piers, sidelights and transom, paired windows  
Carport, NC
- 623 1930s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, 2 interior chimneys, flat-roofed porch with fluted Tuscan columns and iron roof balustrade, transom, gabled-hood with brackets  
Metal Garage/Carriage House

**Lancaster Road, West**  
**800 Block (Even)**

- 800 1920s, Colonial Revival, 2-story, frame house with Permastone and aluminum siding, hip-roofed with hip-roofed dormer, hip-roofed porch supported by columns, transom and sidelights
- 802 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, eaves brackets, interior-side chimney, hip-roofed porch supported by tapered posts on brick piers
- 804 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, central interior chimney, hip-roofed porch supported by square stuccoed posts, spans between posts are arched, sidelights and transom  
Metal Garage, NC
- 806 1920s, Colonial Revival, 2-story, six-course American bond brick house, side-gable-roofed, interior-side chimney, pedimented entry porch with square posts, sidelights  
Metal Shed, NC
- 808 -808A 1940s, Colonial Revival, 2-story, stuccoed house, hip-roofed with semi-circular roof vent, interior-side chimney, pilasters and entablature at entry, octagonal window, side porch with Tuscan columns topped with a balustrade balcony
- 810 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, hip-roofed porch with Tuscan columns on brick piers, paired windows, transom  
Metal Garage/Carriage House
- 812 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, hip-roofed porch with tapered posts on brick piers, turned balustrade, paired windows

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 43

Battery Court Historic District (127-5897)  
Richmond, VA

Metal Garage/Carriage House

- 826 1920s, Bungalow/Craftsman, 2-story, stuccoed house, jerkinhead-roofed with jerkinhead dormer, eaves brackets, interior-side chimney, shed-roofed porch with Tuscan columns on brick piers, paired windows, transom

**Lancaster Road, West**

**800 Block (Odd)**

- 801 1920s, Bungalow/Craftsman, 2-story, stretcher bond brick house, hip-roofed, 2 interior chimneys, hip-roofed porch with tapered posts on brick piers, transom and sidelights, paired windows  
Brick/Metal Garage, NC
- 803 1920s, Bungalow/Craftsman, 2-story, stretcher bond brick house, hip-roofed, interior chimneys, hip-roofed porch with tapered posts on brick piers, transom and sidelights, paired windows  
Metal Garage, NC
- 805 1920s, Colonial Revival, 2-story, stretcher bond brick house, hip-roofed interior-side chimney, semi-circle pediment porch with Tuscan columns, side screened-in porch with Tuscan columns  
Wood Garage, NC
- 807 1920s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, interior-side chimney, hip-roofed porch with fluted Tuscan columns, paired windows, tripartite window
- 809 1920s, Bungalow/Craftsman, 2-story, frame house with Permastone and vinyl siding, hip-roofed, eaves brackets, interior-side chimney, hip-roofed porch with tapered posts on brick piers, paired windows  
Metal Garage/Carriage House
- 811 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, eaves brackets, interior-side chimney, hip-roofed porch with fluted Tuscan columns, turned balustrade, paired windows, tripartite window  
Metal Garage/Carriage House
- 813 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, flat-roofed porch with square paneled columns and roof balustrade, arched hood with brackets at entry  
Metal Garage/Carriage House
- 815 1920s, Colonial Revival 2-story, frame house with wood shingles and aluminum siding, hip-roofed with hip-roofed dormer, interior-side chimney, hip-roofed porch with tapered posts on brick piers, paired windows, transom and sidelights  
Metal Garage/Carriage House

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 44

Battery Court Historic District (127-5897)  
Richmond, VA

- 817 1920s, Colonial Revival, 2-story, frame house with wood shingles and aluminum siding, gambrel-roofed with wall dormers, interior-side chimney, shed-roofed porch with Tuscan columns paired windows, transom and sidelights

**Montrose Avenue**

2700 Block (Odd)

- 2709 1930s, Bungalow/Craftsman, 1-story, stuccoed house, side-gable-roofed, central interior chimney, front-gable-roofed porch with Tuscan columns, tripartite windows  
Metal Garage, NC
- 2711 1920s, Bungalow/Craftsman, 2-story, stuccoed house, side-gable-roofed, exterior side chimney, shed-roofed porch with stuccoed columns  
Metal Garage/Carriage House
- 2713 1950s, NC; Wood Shed, NC
- 2715 1960s, NC
- 2717 1920s, Bungalow/Craftsman, 2-story, frame house with aluminum siding and PermaStone, hip-roofed with hip-roofed dormer, wraparound porch with wrought iron posts and lattice-work brackets, on brick piers, paired windows, tripartite window, transom and sidelights  
Outbuilding demolished as of 2003
- 2719 1920s, Bungalow/Craftsman, 2-story, six-course American bond brick house, hip-roofed with hip-roofed dormer, eaves brackets, interior-side chimney, hip-roofed porch with square posts on brick piers, paired
- 2721 1920s, Bungalow/Craftsman, 1-story, brick house, pyramidal-roofed, overhanging eaves, pyramidal-roofed porch with paired colonettes on brick piers, casement windows  
Brick Garage

**Montrose Avenue**

2800 Block (Even)

- 2804 1920s, Bungalow/Craftsman, 2-story, frame house, side-gable-roofed with gabled dormer, eaves brackets, central interior, shed-roofed porch with paired Tuscan columns on brick piers, transom  
Metal Garage
- 2806 1920s, Bungalow/Craftsman, 2-story, stuccoed house, side-gable-roofed with gabled dormer, eaves brackets, central interior, shed-roofed porch with paired, paneled posts on brick piers, transom

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 45

Battery Court Historic District (127-5897)  
Richmond, VA

- 2808 1920s, Colonial Revival, 2-story, six course American brick bond brick house, hip-roofed with hip-roofed dormer, exterior-side chimney, hip-roofed porch with Tuscan columns, paired windows, transom and sidelights  
Metal Garage
- 2810 1920s, Colonial Revival, 2-story, frame house, hip-roofed with pedimented-dormer, decorative glazing, hip-roofed porch with Ionic columns, turned balustrade, transom
- 2812 1920s, Colonial Revival, 2-story, six-course American bond brick house, hip-roofed with hip-roofed dormer, 2 interior-side chimneys, hip-roofed porch with square paneled columns on brick piers, ribbon window, paired windows, sidelights and transom  
Metal Garage, NC
- 2814 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, eaves brackets, hip-roofed porch with fluted Tuscan columns, decorative glazing, sidelights and transom  
Metal Garage
- 2818 1920s, Bungalow/Craftsman, 2-story, frame house, hip-roofed with hip-roofed dormer, eaves brackets, hip-roofed porch with Tuscan columns on brick piers, paired windows, transom and sidelights  
Metal Shed, NC
- 2820 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, eaves brackets, hip-roofed porch with square stuccoed posts, arched spans between posts, paired windows, sidelights and transom  
Metal Shed, NC

**Montrose Avenue**  
2800 Block (Odd)

- 2801 1920s, Colonial Revival, 2-story, six-course American bond brick apartment building, stepped parapet with cast stone coping, 2 interior side chimneys, 2-story, porticos with square paneled columns and pedimented roof
- 2803 1910s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, central interior chimney, hip-roofed porch with tapered posts on stuccoed piers, polychrome slate shingles, transom and sidelights  
Stucco Garage/Carriage House
- 2805 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, hip-roofed porch with slightly tapered posts, turned balustrade, transom and sidelights  
Wood Garage
- 2807 No Main Building; Wood Garage, NC

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 46

Battery Court Historic District (127-5897)  
Richmond, VA

- 2809 T. J. Cromar Residence, 1920s, Colonial Revival, 2-story, coursed ashlar house, hip-roofed with cross-gables, decorative stone panel in gable, wraparound porch with paneled posts on ashlar piers, arched fanlight at entry
- 2811 1920s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, hip-roofed porch with tapered posts, tripartite window, transom and sidelights  
Metal Garage
- 2813 1910s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with shed dormer, central interior chimney, shed-roofed porch with square stuccoed piers, arched spans between piers, transom and sidelights  
Metal Garage
- 2815 1910s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, central interior chimney, hip-roofed porch with pedimented entry-bay, transom and sidelights
- 2817 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with 2 gable wall dormers, interior-side chimney, hip-roofed porch with square posts
- 2819 1910s, Colonial Revival, 2-story, frame house with brick-tex siding, hip-roofed, 2 interior-side chimneys, wraparound porch with Tuscan columns, transom and sidelights  
Metal Shed, NC

**Montrose Avenue**

2900 Block (Even)

- 2900 1920s, Bungalow/Craftsman, 2-story, a six-course American bond brick house, hip-roofed with hip-roofed dormer, exposed rafters, wraparound porch with tapered columns on brick piers, paired windows
- 2902 1920s, Colonial Revival, 2-story, stuccoed house, side-gable-roofed with 2 gabled dormers, central interior, shed-roofed porch with tapered, paneled columns, paired windows, transom  
Stucco Garage
- 2904 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with shed-dormer, shed-roofed porch with square fluted columns, paired windows, sidelights and a transom  
Outbuilding demolished as of 2003
- 2906 1920s, Colonial Revival, 2-story, frame house, hip-roofed with gabled dormer, hip-roofed porch with square fluted columns, Palladian window, paired and tripartite windows, sidelights and transom  
Metal Garage

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 47

Battery Court Historic District (127-5897)  
Richmond, VA

- 2908 1910s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with gabled dormer, eaves brackets, hip-roofed porch with square stuccoed posts, arched spans between posts, Palladian window, paired and tripartite window, sidelights and a transom  
Metal Garage
- 2910 1910s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, eaves brackets, hip-roofed porch with square stuccoed posts, arched spans between posts, paired windows, sidelights and a transom  
Metal Garage
- 2914 1910s, Colonial Revival, 2-story, stuccoed house, hip-roofed with cross-gables, hip-roofed porch with pedimented entry-bay and square stuccoed posts, decorative glazing, paired window, sidelights and transom  
Concrete Block Garage and Outbuilding, 2 NC
- 2916 1910s, Colonial Revival, 2-story, frame house, hip-roofed with cross-gables, central interior chimney, hip-roofed porch with pedimented entry-bay and square, fluted columns, turned balustrade, decorative glazing, paired window, sidelights and a transom
- 2918 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, eaves brackets, hip-roofed porch with square stuccoed posts, arched spans between posts, paired windows, sidelights and transom  
Metal Garage
- 2920 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with gabled dormer, eaves brackets, hip-roofed porch with pedimented entry-bay, Tuscan columns, Palladian window, paired and tripartite windows, sidelights and transom

**Montrose Avenue**

2900 Block (Odd)

- 2901 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, eaves brackets, hip-roofed porch with pedimented entry-bay with Tuscan columns, transom and sidelights
- 2903 1910s, Colonial Revival, 2-story, frame house, hip-roofed with pedimented dormer, hip-roofed porch with pedimented entry-bay with fluted tapered posts and brackets, Palladian window, transom and sidelights  
Metal Garage
- 2905 1910s, Colonial Revival, 2-story, frame house, hip-roofed with pedimented dormer, hip-roofed porch with fluted Ionic columns and turned balustrade, Palladian window, transom and sidelights  
Metal Shed and Wood Shed, 2 NC

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 48

Battery Court Historic District (127-5897)  
Richmond, VA

- 2907 1910s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, central interior chimney, hip-roofed porch with pedimented entry-bay with modern wrought iron supports, transom and sidelights  
Metal Garage
- 2909 1920s, Bungalow/Craftsman, 2-story stuccoed house, side-gable-roofed with gabled dormer, eaves brackets, 2 interior-side chimneys, shed-roofed porch with stuccoed and brick piers, arched spans between piers, paired windows, transom  
Patio, NC, and Stucco Garage/Carriage House
- 2911 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, interior-side chimney, hip-roofed porch with paneled tapered posts on brick piers, transom and sidelights  
Metal Garage and Wood Shed
- 2913 1920s, Colonial Revival, 2-story, frame house, hip-roofed with pedimented dormer, 2 interior chimneys, hip-roofed porch with pedimented entry-bay with fluted ionic columns, Palladian window, transom and sidelights  
Concrete Block/Glass Block Workshop
- 2915 1910s, Colonial Revival, 2-story, frame house, hip-roofed with pedimented dormer, 2 interior chimneys, hip-roofed porch with pedimented entry-bay with square fluted ionic columns, Palladian window, transom and sidelights
- 2917 1910s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, hip-roofed porch with Tuscan columns on brick piers, paired windows, transom and sidelights
- 2919 1920s, Bungalow/Craftsman, 2-story, frame house, hip-roofed with hip-roofed dormer, exposed rafters, hip-roofed porch with tapered paneled posts on brick piers, paired windows, transom and sidelights  
Stucco Garage

**Moss Side Avenue**  
**2800 Block (Even)**

- 2806-2814 Mount Hermon Baptist Church (Battery Park Christian Church), 1920s, Colonial Revival, 2-stories, frame church, pedimented-front gable with lunette window, interior side chimney, 1-story, pedimented portico with fluted Tuscan columns, sidelights and fanlight, extension with covered sidewalk to secondary building  
1-story, side-gable roofed, frame building, brick interior chimney

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 49

Battery Court Historic District (127-5897)  
Richmond, VA

**Moss Side Avenue**

**2800 Block (Odd)**

- 2809 1920s, Bungalow/Craftsman, 2-story frame house, gable roof with shed dormer, interior-side chimney, shed-roofed porch with square posts on brick piers  
Concrete Block Garage, NC
- 2811 1930s, Colonial Revival, 2-story, stuccoed house, side-gable-roofed with 2 pedimented dormers, interior-side chimney, shed-roofed porch with Tuscan columns, turned balustrade, tripartite windows with transoms, transom
- 2813 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, interior-side chimney, wraparound porch with Tuscan columns on brick piers, tripartite windows with transoms, transom and sidelights  
Metal Shed, NC
- 2815 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with gabled dormer, shed-roofed porch with Tuscan columns, turned balustrade, tripartite windows, transom  
Outbuilding demolished as of 2003
- 2817 1930s, Colonial Revival, 2-story, English bond brick house, side-gable-roofed with 3 pedimented dormers, a side-exterior chimney, brick stoop, paired fluted pilasters and pediment at entry  
Brick Garage/Carriage House
- 2819 1920s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, interior-side chimney, wraparound porch with Tuscan columns, transom and sidelights  
Wood Garage/Carriage House

**Moss Side Avenue**

**2900 Block (Even)**

- 2900 1915, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, eaves brackets, interior-side chimneys, wraparound porch with Tuscan columns, paired windows, tripartite window, sidelights and transom  
Metal Garage
- 2902 1915, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, eaves brackets, 2 interior-side chimneys, hip-roofed porch with paired square columns on stuccoed piers, arched span between columns, paired windows, tripartite window, transoms  
Metal Garage, NC
- 2904 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with gabled dormer, eaves brackets, interior-side chimney, shed-roofed porch with Tuscan columns, turned balustrade, tripartite windows, transom

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 50

Battery Court Historic District (127-5897)  
Richmond, VA

- Metal Garage, NC**
- 2906 1920s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, eaves brackets, interior-side chimney, wraparound porch with Tuscan columns, paired and tripartite windows, sidelights and transom
- Metal Garage, NC**
- 2908 1930s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, eaves brackets, entry porch with Tuscan columns roof balustrade
- 2912 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, interior-side chimney, hip-roofed porch with fluted Tuscan columns, turned balustrade, transom and sidelights
- Stucco Garage/Carriage House**
- 2914 1930s, Colonial Revival, 2-story, six-course American bond brick house, side-gable-roofed, interior-side chimney, shed-roofed porch with square columns, transom
- 2916 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with 2 gabled dormers, eaves brackets and dentils, interior-side chimney, hip-roofed porch with Tuscan columns, turned balustrade, tripartite windows with transoms, transom
- Stucco Garage/Carriage House**
- 2918 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with shed-dormer, hip-roofed porch with pedimented entry-bay, fluted square columns, turned balustrade, tripartite window with fanlight, decorative glazing, sidelights and a transom
- 2920 1980s, **NC**

**Moss Side Avenue**

2900 Block (Odd)

- 2901 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, interior-side chimney, hip-roofed porch with tapered posts on stuccoed piers and exposed rafters, transom
- Stucco Garage**
- 2903 1910s, Bungalow/Craftsman, 2-story, stuccoed house with wood shingles, hip-roofed with hip-roofed dormer, exposed rafters, interior-side chimney, hip-roofed porch with tapered posts on stuccoed piers, tripartite windows, transom
- Stucco Garage**
- 2905 1910s, Colonial Revival, 2-story, stuccoed house, side-gable-roofed with 2 pedimented dormers, interior-side chimney, porch with Tuscan columns and turned balustrade, tripartite windows, transom and sidelights
- Metal Garage**

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 51

Battery Court Historic District (127-5897)  
Richmond, VA

- 2907 1910s, Colonial Revival, 2-story, stuccoed house, side-gable-roofed with 2 pedimented dormers, interior-side chimney, porch with Tuscan columns on ashlar piers and turned balustrade, tripartite windows, transom and sidelights  
Metal Garage
- 2909 1910s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, wraparound porch with Tuscan colonettes on stuccoed piers and dentiled cornice, tripartite windows, transom and sidelights
- 2911 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, wraparound porch with Tuscan colonettes on stuccoed piers and dentiled cornice, tripartite windows, transom and sidelights
- 2913 1910s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, eaves brackets, hip-roofed porch with Tuscan columns, paired and tripartite windows  
Metal Garage
- 2915 1910s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, eaves brackets, wraparound hip-roofed porch with Tuscan columns, paired and tripartite windows, transoms  
Metal Garage
- 2917 1920s, Bungalow/Craftsman, 2-story, six-course American bond brick house, hip-roofed with hip-roofed dormer, hip-roofed porch with square paneled columns on brick piers, paired windows, ribbon window, transom and sidelights  
Stucco Garage
- 2919 1920s, Colonial Revival, 2-story, frame house, hip-roofed with 2 pedimented dormers, hip-roofed porch with square paneled columns and turned balustrade, tripartite window with fanlight, decorative glazing, transom and sidelights

**Noble Avenue**  
2900 Block (Even)

- 2900 1920s, Bungalow/Craftsman, 2-story, stuccoed house, jerkinhead-roofed with jerkinhead dormer, exposed rafters and eaves brackets, side-exterior chimney, stoop with gable hood and brackets, paired windows, transom and sidelights  
Stucco Garage/Carriage House
- 2902 1920s, Colonial Revival, 2-story, stuccoed house, gable-roofed with 2 pedimented dormers, interior-side chimney, wraparound porch with Tuscan columns, tripartite windows, transom
- 2904 1910s, Colonial Revival, 2-story, frame house, hip-roofed with 2 pedimented dormers, interior-side chimney, hip-roofed porch with tapered posts, turned balustrade, decorative glazing, tripartite window with arched fanlight, transom and sidelights

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 52

Battery Court Historic District (127-5897)  
Richmond, VA

- Metal Shed, NC**
- 2906 1920s, Bungalow/Craftsman, 2-story, stretcher bond brick house, hip-roofed with a hip-roofed dormer, exposed rafters, interior-side chimney, hip-roofed porch with tapered posts on brick piers, transom and sidelights
- Stucco Garage/Carriage House**
- 2908 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with pedimented dormer, side-exterior chimney, wraparound porch with pedimented entry-bay and tapered stuccoed posts, decorative glazing, transom and sidelights
- Wood Shed, NC**
- 2910 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, interior-side chimney, wraparound porch with Tuscan colonettes on rusticated piers, transom and sidelights
- Wood Shed, NC**
- 2912 1920s, Bungalow/Craftsman, 2-story, six-course American bond brick house, hip-roofed with hip-roofed dormer, 2 interior-side chimneys, hip-roofed porch with paneled posts on brick piers, paired windows, transom and sidelights
- 2914 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, interior-side chimney, wraparound porch with gabled entry with tapered posts, half-timbering, tripartite window with a transom, decorative glazing, transom and sidelights
- 2916 1910s, Bungalow/Craftsman, 2-story, frame house with aluminum siding and PermaStone, hip-roofed with hip-roofed dormer, 2 interior-side chimneys, pedimented entry porch with tapered posts on PermaStone piers, tripartite windows, transom and sidelights
- 2918 1920s, Bungalow/Craftsman, 2-story, frame house, hip-roofed with hip-roofed dormer, interior-side chimney, hip-roofed porch with pedimented entry-bay, fluted Tuscan columns and turned balustrade, tripartite window, decorative glazing, transom and sidelights
- Stucco Garage/Carriage House**
- 2920 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with shed dormer, interior-side chimney, wraparound porch with pedimented entry-bay with fluted Tuscan columns, tripartite window, decorative glazing, transom and sidelights
- Wood Garage**
- 2922 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with gabled dormer, exposed rafters, central-interior chimney, wraparound porch with stuccoed piers, arched spans between piers, transom

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 53

Battery Court Historic District (127-5897)  
Richmond, VA

**Noble Avenue**

**2900 Block (Odd)**

- 2903 1920s, Colonial Revival, 2-story, frame house with wood shingles, hip-roofed with hip-roofed dormer, hip-roofed porch with Tuscan columns on brick piers, paired windows, transom and sidelights  
Stucco/Wood Garage
- 2905 1920s, Colonial Revival, 2-story, frame house, gambrel-roofed with full-width shed-dormer, interior side chimney, paired windows, brick stoop with pedimented hood with brackets, transom
- 2907 1920s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, exterior side chimney, hip-roofed porch with tapered square columns on brick piers, paired windows, transom and sidelights  
Wood Garage
- 2911 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, overhanging eaves, 2 interior side chimneys, wraparound hip-roofed porch with Tuscan columns, paired windows, transom and sidelights  
Stucco Workshop
- 2913 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, exposed rafters, hip-roofed porch with square posts, arched span between posts, paired windows, transom  
Wood Garage/Carriage House
- 2915 1920s, Colonial Revival, 2-story, six-course American bond brick house, hip-roofed with hip-roofed dormer, hip-roofed porch with fluted Tuscan columns on brick piers, paired and tripartite windows transom and sidelights
- 2917 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, overhanging eaves, hip-roofed porch with tapered posts on a stuccoed piers, tripartite windows, transom and sidelights
- 2919 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with gabled dormer, overhanging eaves, shed-roofed porch with Tuscan columns, tripartite windows, transom and sidelights  
Wood Garage, NC
- 2921 1920s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, wraparound porch with Tuscan colonettes on a brick piers, transom and sidelights
- 2923 1920s, Bungalow/Craftsman, 2-story, stretcher bond brick house, hip-roofed, interior-side chimney, hip-roofed porch with tapered brick piers, transom  
Metal Garage

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 54

Battery Court Historic District (127-5897)  
Richmond, VA

- 2925 1910s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, hip-roofed porch with pedimented entry-bay, Tuscan columns on coursed ashlar piers and turned balustrade, tripartite windows, transom  
Metal Garage
- 2927 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, hip-roofed porch with tapered posts on stuccoed piers, transom and sidelights  
Outbuilding demolished as of 2003

**North Avenue**

2400 Block (Even)

- 2400-2402 1920s, Colonial Revival, 2-story, stuccoed brick commercial building, false mansard roof with gabled dormer, lunette window, cornice return, stone lintels and sills
- 2404 Pentacostal Church of Christ, 1900s, Colonial Revival, 1-story, stretcher bond brick church, false mansard roof with a bracketed cornice, original storefront
- 2408 1920s, Colonial Revival, 2-story, brick commercial building, false mansard roof with 2 pedimented dormers, interior chimney, store-front facade with projecting cornice, paired windows
- 2410 1920s, Colonial Revival, 2-story, brick multi-family building, false mansard roof
- 2412 1920s, Colonial Revival, 2-story, brick multi-family building, false mansard roof
- 2414 A&B 1920s, Colonial Revival, 2-story, brick multi-family building, false mansard roof
- 2416 1930s, Late-Nineteenth/Early Twentieth Century, 1-story brick commercial building, storefront, recessed brick panels in parapet
- 2418 -2420 1930s, Late-Nineteenth/Early Twentieth Century, 1-story brick commercial building, storefront, recessed brick panels in parapet
- 2422 1920s, Colonial Revival, 2-story, brick, 2-story porch with paneled posts and piers, store front window, transoms
- 2424 1920s, Colonial Revival, 2-story, brick, 2-story porch with paneled posts and piers, store front window, transoms

**North Avenue**

2500 Block (Even)

- 2500-2500A 1930s, Colonial Revival, 2-story, five-course American bond brick multiple family house, side-gable-roofed, 2-story, portico, gable-roofed with paneled posts  
Brick Shed

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 55

Battery Court Historic District (127-5897)  
Richmond, VA

- 2502 1920s, Tudor Revival, 2-story, six-course American bond brick multiple family house, side-gable-roofed with front parapeted-gable, modillioned cornice, 2 porches with Tuscan columns and roof balustrade  
Outbuilding demolished as of 2003
- 2504 1920s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, interior-side chimney, wraparound porch with Tuscan columns  
Brick Garage/Carriage House
- 2506 1920s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, interior-side chimney, porch with fluted, tapered posts turned balustrade, paired windows, decorative glazing, transom and sidelights  
Metal Shed, NC
- 2508 1920s, Tudor Revival, 2-story, seven-course American bond brick multiple family brick house, side-gable-roofed with front parapeted-gable, modillioned cornice, 2 porches with Tuscan columns
- 2512 1920s, Colonial Revival, 2-story, frame house, side-gable-roofed with 2 pedimented dormers, porch with paired colonettes on stone piers and roof balustrade

**North Avenue**

2600 Block (Even)

- 2604 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, exposed rafters, interior-side chimney, hip-roofed porch with tapered posts on paneled piers, paired windows, transom and sidelights
- 2606 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, interior chimney, hip-roofed porch with tapered posts on paneled piers, tripartite window, transom and sidelights
- 2610 1920s, Colonial Revival, 2-story, frame house, hip-roofed with pedimented dormer, exterior-side chimney, hip-roofed porch with pedimented entry-bay, Ionic columns and turned balustrade, transom and sidelights

**Norwood Avenue, West**

00 Block (Odd)

- 7 1920s, Colonial Revival, 2-story, frame house, hip-roofed with cross-gables, 2 interior chimneys, hip-roofed porch with fluted square posts, turned balustrade, decorative glazing, transom and sidelights
- 9 1960s, NC
- 11 1920s, Colonial Revival, 2-story, frame house, hip-roofed with cross-gables, hip-roofed dormer, 2 interior chimneys, hip-roofed porch with fluted square posts, turned balustrade, decorative glazing, transom and sidelights

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 56

Battery Court Historic District (127-5897)  
Richmond, VA

Metal Garage

**Norwood Avenue, West**

100 Block (Odd)

- 101 1920s, Bungalow/Craftsman, 2-story, frame house, side-gable-roofed with gabled dormer, exposed rafters and eaves brackets, side-exterior chimney, shed-roofed porch with tapered brick piers, arched span between piers  
Metal Garage/Carriage House
- 103 1910s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, central interior chimney, hip-roofed porch with Tuscan columns, turned balustrade, decorative glazing, transom and sidelights
- 105 1910s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, central interior chimney, hip-roofed porch with tapered posts, transom and sidelights
- 107 1910s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, exposed rafters, central interior chimney, hip-roofed porch with tapered posts, arched spans between posts, decorative glazing, transom and sidelights
- 111 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, interior chimney, hip-roofed porch with tapered posts, transom
- 113 1910s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, 2 chimneys, hip-roofed porch with pedimented entry-bay and fluted square posts, transom and sidelights  
Metal Garage
- 115 1920s, Colonial Revival, 2-story, frame house with Permastone and aluminum siding, hip-roofed with hip-roofed dormer, 2 chimneys, hip-roofed porch with pedimented entry-bay and Tuscan columns, turned balustrade, transom and sidelights
- 117 1920s, Colonial Revival, 2-story, frame house, hip-roofed with pedimented dormer, 2 chimneys, Palladian window, hip-roofed porch with pedimented entry-bay and square posts, transom and sidelights  
Metal Garage
- 119 1920s, Colonial Revival, 2-story, frame house, hip-roofed with pedimented dormer, side-exterior chimney, Palladian window, hip-roofed porch with pedimented entry-bay and modern wrought iron posts and balustrade, transom and sidelights

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 57

Battery Court Historic District (127-5897)  
Richmond, VA

**Overbrook Road**

00 Block (Even)

- 8 1910s, Colonial Revival, 2-story, frame house with Permastone and aluminum siding, hip-roofed with hip-roofed dormer, side-exterior chimney, hip-roofed porch with Tuscan columns, turned balustrade, transom and sidelights  
Outbuilding demolished as of 2003
- 10 James H. Poindexter Residence, 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, exposed rafters, central-interior chimney, hip-roofed porch with tapered posts on brick piers, paired windows, transom and sidelights
- 12 1910s, Colonial Revival, 2-story, stretcher bond brick house, hip-roofed with hip-roofed dormer, side-exterior chimney, hip-roofed porch with Tuscan columns, turned balustrade, transom and sidelights  
Brick Garage
- 14-16 1910s, Colonial Revival, 2-story, six-course American brick bond brick house, hip-roofed with hip-roofed dormer, interior-side chimney, wraparound porch with Tuscan columns, transom and sidelights  
Stucco Garage
- 18-18A 1910s, Colonial Revival, 2-story, frame house with brick-tex siding, hip-roofed with cross-gables, shed dormer, hip-roofed porch with pedimented entry-bay with Tuscan columns, turned balustrade, decorative glazing, tripartite window with an arched fanlight, transom  
Outbuilding demolished as of 2003
- 20 1910s, Colonial Revival, 2-story, brick house, hip-roofed with shed dormer, hip-roofed porch with pedimented entry-bay with paired Tuscan colonettes on paneled piers, decorative glazing, tripartite window with an arched fanlight, transom and sidelights  
Metal Garage, **NC**
- 24 1910s, Colonial Revival, 2-story, six-course American brick bond brick house, hip-roofed with hip-roofed dormer, exposed rafters, 2 interior-side chimneys, hip-roofed porch with pedimented entry-bay with Tuscan columns on brick piers, transom and sidelights  
Metal Garage

**United States Department of Interior**  
National Park Service

**National Register of Historic Places**  
**Continuation Sheet**

Section number 7 Page 58

---

Battery Court Historic District (127-5897)  
Richmond, VA

**Overbrook Road**

00 Block (Odd)

- 3 1920s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, exterior-side chimney, hip-roofed porch with tapered posts on brick piers, paired windows, transom and sidelights
- 5 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, exterior-side chimney, hip-roofed porch with tapered brick piers, paired windows, transom and sidelights
- 7 1920s, Bungalow/Craftsman, 2-story, six-course American brick bond brick house, hip-roofed with hip-roofed dormer, exterior-side chimney, hip-roofed porch with tapered brick piers, paired windows, transom and sidelights
- 9 1920s, Colonial Revival, 2-story, frame house with brick-tex siding, hip-roofed, exterior-side chimney, wraparound porch with Tuscan columns, turned balustrade, transom
- 11 1920s, Bungalow/Craftsman, 2-story, stuccoed house, side-gable-roofed with gabled dormer, eave brackets and exposed rafters, exterior-side chimney, shed-roofed porch with posts grouped in fours on brick piers, transom and sidelights
- Outbuilding demolished as of 2003
- 15 1920s, Colonial Revival, 2-story, stretcher bond brick house, hip-roofed with pedimented dormer, interior-side chimney, wraparound porch with Ionic columns, turned balustrade, stone lintels, transom and sidelights
- Brick Garage
- 19 Overbrook Presbyterian Church, 1940s, Classical Revival, 2-story, stretcher bond brick church, English basement, pedimented portico with fluted Tuscan columns in antis, parapeted-roof, simple entablature, windows with bracketed pediments, 2 double leaf doors with transoms

**Overbrook Road**

100 Block (Even)

- 100 1910s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, central interior chimney, hip-roofed porch with Ionic columns, decorative balustrade, porch has modillions in cornice, transom and sidelights

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 59

Battery Court Historic District (127-5897)  
Richmond, VA

- 102 1910s, Colonial Revival, 2-story, stuccoed house, side-gable-roofed with 2 pedimented dormers and paired brackets in eaves, shed-roofed porch with Tuscan columns
- 104 1910s, Colonial Revival, 2-story, frame house, hip-roofed with cross-gables, hip-roofed porch with pedimented entry-bay with Ionic columns, turned balustrade, transom and sidelights  
Metal Garage
- 106 1910s, Colonial Revival, 2-story, frame house, hip-roofed with cross-gables and hip-roofed dormer, diamond glazing, hip-roofed porch with pedimented entry-bay with square fluted Ionic columns, turned balustrade, transom and sidelights  
Metal Shed, NC
- 108 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, side-exterior chimney, hip-roofed porch with stuccoed piers, paired windows, transom and sidelights  
Metal Garage, NC
- 110 1920s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, central-interior chimney, hip-roofed porch with Tuscan columns, paired windows, transom and sidelights  
Metal Garage
- 112 1910s, Bungalow/Craftsman, 2-story, frame house, side-gable-roofed with shed dormer, shed-roofed porch with sided, square posts, transom and sidelights
- 114 1910s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, central interior chimney, hip-roofed porch with Tuscan colonettes, transom and sidelights  
Outbuilding demolished as of 2003
- 116 1910s, Colonial Revival, 2-story, frame house, hip-roofed with cross-gables, hip-roofed dormer, hip-roofed porch with pedimented entry-bay with square fluted Ionic columns, turned balustrade, transom and sidelights

**Overbrook Road**

100 Block (Odd)

- 101 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with cross-gables, hip-roofed dormer, central interior chimney, porch with pedimented entry-bay with square fluted Ionic columns, turned balustrade, diamond paned windows, tripartite window, transom and sidelights  
Outbuilding demolished as of 2003

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 60

Battery Court Historic District (127-5897)  
Richmond, VA

- 103 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, hip-roofed porch with Tuscan columns, turned balustrade, transom and sidelights  
Stucco Garage
- 105 1920s, Bungalow/Craftsman, 2-story, stuccoed house, side-gable-roofed with gabled dormer, eaves brackets, exterior-side chimney, shed-roofed porch with tapered brick piers, transom  
Stucco Garage
- 107 1920s, Colonial Revival, 2-story, six-course American brick bond brick house, hip-roofed with hip-roofed dormer, interior-side chimney, hip-roofed porch with Tuscan columns on brick piers, transom and sidelights  
Metal Garage/Carriage House
- 109 1920s, Bungalow/Craftsman, 2-story, stuccoed house, side-gable-roofed with hip-roofed dormer, eaves brackets, interior-side chimney, hip-roofed porch with Tuscan columns, turned balustrade, tripartite window, transom and sidelights  
Metal Garage
- 111 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, central interior chimney, shed-roofed porch with stuccoed piers with arched spans, transom, arched hood with brackets at recessed entry
- 113 1920s, Bungalow/Craftsman, 2-story, frame house, side-gable-roofed with shed dormer, eaves brackets, central interior chimney, shed-roofed porch with Tuscan columns, transom and sidelights  
Vinyl Sided Garage, NC
- 115 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, hip-roofed porch with square posts on brick piers, transom and sidelights
- 117 1910s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, central interior chimney, brick stoop, transom and sidelights  
Wood Garage, NC

**Overbrook Road**  
300 Block (Even)

- 300 1930s, Colonial Revival, 2-story, frame house, hip-roofed with cross-gables and pedimented dormer, hip-roofed porch with entry pediment with fluted Ionic columns, turned balustrade transom and sidelights  
Metal Shed
- 302 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with pedimented dormer, interior-side chimney, hip-roofed porch with pedimented entry-bay with

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 61

Battery Court Historic District (127-5897)  
Richmond, VA

fluted Ionic columns, turned balustrade, tripartite window with an arched fanlight, transom and sidelights

Stucco Garage

- 304 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with cross-gables, side-exterior chimney, hip-roofed porch with pedimented entry-bay with fluted square Ionic columns, decorative glazing, tripartite window with arched fanlight, oval window, sidelights

Wood Shed, NC

- 306 1920s, Colonial Revival, 2-story, frame house, hip-roofed with cross-gables, side-exterior chimney, hip-roofed porch with pedimented entry-bay with fluted square Ionic columns, turned balustrade, tripartite window, transom and sidelights

Wood Shed, NC

- 308 1920s, Colonial Revival, 2-story, frame house, jerkinhead roof with cornice return, 2 interior-side chimneys, tripartite window, wraparound porch with fluted Tuscan columns, transom and sidelights

Metal Shed, NC

- 310 1930s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, side-exterior chimney, hip-roofed porch with pedimented entry-bay with fluted Tuscan columns on brick piers, windows with fanlights, transom and sidelights

Stucco Garage

- 312 1930s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, paired brackets in eaves, side-exterior chimney, hip-roofed porch with pedimented entry-bay with fluted Tuscan columns on brick piers, windows with fanlights, transom and sidelights

Metal Garage

- 314 1910s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, central-interior chimney, hip-roofed porch with Tuscan columns, transom and sidelights

- 316 1910s, Bungalow/Craftsman, 2-story, stuccoed house, side-gable-roofed, central-interior chimney, shed-roofed porch with tapered posts, transom and sidelights

Metal Shed

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 62

Battery Court Historic District (127-5897)  
Richmond, VA

**Overbrook Road**

300 Block (Odd)

- 301 Howard Whitehead Residence, 1920s, Bungalow/Craftsman, 2-story, stuccoed house, side-gable-roofed with 2 gabled dormers, interior chimney, hip-roofed porch with square posts, transom and sidelights
- 303 1920s, Bungalow/Craftsman, 2-story, frame house, cross-gambrel-roofed with cornice return, interior-side chimney, wraparound porch with tapered brick piers, 2 tripartite  
Stucco/Metal Garage, NC
- 305 1920s, Bungalow/Craftsman, 2-story, frame house, cross-gable-roofed, continuous cornice, Palladian windows and wood shingles in gables, central-interior chimney, hip-roofed porch with square piers with brackets  
Concrete Block Shed, NC
- 307 1920s, Bungalow/Craftsman, 2-story, stuccoed house, side-gable-roofed with gabled dormer with brackets, central-interior chimney, shed-roofed porch with tapered brick piers  
Tin/Wood Shed, NC
- 309 1920s, Bungalow/Craftsman, 2-story, six-course American brick bond brick house, hip-roofed with hip-roofed dormer and eaves paired brackets, side-exterior chimney, hip-roofed porch with tapered posts on brick piers, transom and sidelights  
Metal Shed, NC
- 315 1920s, Colonial Revival, 2-story, frame house, cross-gambrel-roofed with cornice return, interior-side chimney, tripartite window, flat-roofed porch with rusticated block piers, transom and sidelights

**Overbrook Road**

600 Block (Even)

- 608 1920s, Colonial Revival, 2-story, frame house with PermaStone on first story, hip-roofed with a hip-roofed dormer, interior-side chimney, pedimented portico with wrought iron posts  
Wood Carriage House
- 610 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, exterior-side chimney, paired windows, brick stoop with iron railing, fluted pilasters and broken pediment at entry
- 612 1920s, Bungalow/Craftsman, 2-story, stuccoed house, jerkinhead roof and dormer, paired windows, shed-roofed porch with tapered brick piers and stuccoed flat arch, sidelights

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 63

Battery Court Historic District (127-5897)  
Richmond, VA

- Metal Garage/Carriage House
- 614 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, exterior-side chimney, hip-roofed porch with square posts spanned, sidelights
- Metal Garage/Carriage House
- 616 1930s, Colonial Revival, 2-story, five-course American bond brick house, side-gable-roofed, exterior-side chimney, shed-roofed porch with square columns
- 618 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, interior-side chimney, one-bay hip-roofed porch with tapered brick piers
- Wood Garage/Carriage House
- 620 1920s, Colonial Revival, 2-story, brick and stuccoed house, side-gable-roofed, interior-side chimney, paired windows, shed-roofed porch with pedimented entry bay and stuccoed columns, sidelights and fanlight
- Stucco Garage
- 622 1920s, Bungalow/Craftsman, 2-story, stuccoed house, side-gable-roofed with gabled dormer, interior-side chimney, shed-roofed porch with tapered brick piers, sidelights and topped with a transom
- Metal Garage
- 624 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, interior-side chimney, hip-roofed porch with tapered stuccoed posts on brick, sidelights and transom
- Concrete Block Garage, **NC**

**Overbrook Road**

600 Block (Odd)

- 607 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, interior-side chimney, decorative glazed windows, hip-roofed porch with tapered brick piers, sidelights and a transom
- Outbuilding demolished as of 2003
- 609 1920s, Bungalow/Craftsman, 2-story, stuccoed house, side-gable-roofed with front-gabled dormer with brackets, interior-side chimney, shed-roofed porch with tapered brick piers, sidelights and a transom
- Stucco Garage
- 611 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, side-exterior chimney, hip-roofed porch with stuccoed Doric columns, paired windows
- Concrete Block Garage, **NC**

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 64

Battery Court Historic District (127-5897)  
Richmond, VA

- 613 1956, Colonial Revival, 2-story, a six-course American bond house, side-gable-roofed with 2 wall dormers, side-exterior chimney, pilasters and broken pediment at entry, round window  
Metal Garage, NC
- 615 1920s, Colonial Revival, 2-story, frame house with Permastone and T-111 siding, hip-roofed with hip-roofed dormer, brick stoop, arched pediment with on brackets at entry  
Metal Garage, NC
- 617 1930s, Colonial Revival, 2-story, stretcher bond brick house, side-gable-roofed, exterior-side chimney, brick stoop with hip-roofed overhang  
Outbuilding demolished as of 2003
- 619 1920s, Bungalow/Craftsman, 2-story, stuccoed house, jerkinhead roof and dormer with brackets, interior-side chimney, shed-roofed porch with tapered brick piers with stuccoed arches between piers, sidelights
- 621 1920s, Colonial Revival, 2-story, frame house with Permastone and T-111 siding, hip-roofed with wide overhanging eaves, flat-roofed porch with Tuscan columns, tripartite window, sidelights  
Parged Brick Garage
- 623 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, hip-roofed porch with square posts on brick piers, paired windows, sidelights and transom  
Stucco Garage/Carriage House
- 625 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, hip-roofed porch with tapered brick piers, paired and tripartite windows, sidelights and transom  
Asbestos Shed and Vinyl Sided Garage, 2 NC  
Other Outbuilding demolished as of 2003

**Overbrook Road**  
800 Block (Even)

- 800 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, interior-side chimney, paired and tripartite windows, hip-roofed porch with columns on brick  
Stucco Garage
- 802 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, interior-side chimney, paired and tripartite windows, hip-roofed porch with columns on brick  
Metal Garage/Carriage House

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 65

---

Battery Court Historic District (127-5897)  
Richmond, VA

- 804 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, exterior-side chimney, paired and bay windows, hip-roofed entry porch with wrought iron supports  
Metal Garage/Carriage House
- 806 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, exterior-side chimney, paired and tripartite windows, hip-roofed porch with columns on brick piers  
Metal Garage/Carriage House
- 808 1920s, Bungalow/Craftsman, 2-story, stuccoed house, side-gable-roofed with gabled dormer, interior-side chimney, shed-roofed porch with tapered stuccoed posts on brick  
Metal Garage/Carriage House
- 810 1920s, Colonial Revival, 2-story, a six-course American bond brick house, side-gable-roofed, 2 interior-side chimneys, front stoop with iron railings, entry with pilasters and broken pediment
- 812 1920s, Colonial Revival, 2-story, six-course American bond brick house, side-gable-roofed, 2 interior-side chimneys, front stoop with iron railings, entry with pilasters and broken pediment  
Brick Row of Garages
- 814 1920s, Colonial Revival, 2-story, six-course American bond brick apartment building, flat roof with continuous parapet with three gabled-sections, entry with pilasters and arched pediment, one-bay, three-story hip-roofed porticos

**Overbrook Road**

**800 Block (Odd)**

- 801 1950s, **NC**
- 803 1920s, Bungalow/Craftsman, 2-story, six-course American bond brick house, hip-roofed with hip-roofed dormer, tripartite and paired windows, hip-roofed porch with tapered brick piers, sidelights and transom  
Concrete Block Garage/Carriage House
- 805 1920s, Colonial Revival, 2-story, six-course American bond brick house, hip-roofed with hip-roofed dormer, 2 interior-side chimneys, 2 tripartite windows one with a fanlight, decorative brick-work, wraparound porch with fluted Tuscan columns on rusticated block piers, turned balustrade, sidelights and fanlight transom at entry  
2-story Brick Garage/Carriage House
- 807 1920s, Colonial Revival, 2-story, six-course American bond brick house, hip-roofed with hip-roofed dormer, interior-side chimney, hip-roofed porch with square paired columns on brick piers, sidelights and transom

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 66

Battery Court Historic District (127-5897)  
Richmond, VA

Brick Garage/Carriage House

809 1910s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, overhanging eaves, interior-side chimney hip-roofed porch with stuccoed columns, sidelights

Wood Workshop

811 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, overhanging eaves, interior-side chimney, wraparound porch with tapered brick piers and stuccoed arches, sidelights and transom

**The Plaza**

2600 Block (Even)

2600 1920s, Bungalow/Craftsman, 2-story, frame house with aluminum siding and PermaStone, side-gable-roofed with gabled dormer, exterior side chimney, shed-roofed porch with tapered brick piers, arched span between piers, paired windows, transom and sidelights

Metal Carport, **NC**, and Metal Shed

2602 1920s, Bungalow/Craftsman, 2-story, frame house, hip-roofed with hip-roofed dormer, interior side chimney, hip-roofed porch with Tuscan columns on brick piers, paired windows, transom and sidelights

Outbuilding demolished as of 2003

2604 1920s, Colonial Revival, 2-story, frame house, side-gable-roofed, exterior side chimney, shed-roofed porch with Tuscan columns, turned balustrade, tripartite window, transom and sidelights

2606 1920s, Bungalow/Craftsman, 2-story, frame house, hip-roofed with hip-roofed dormer, 2 interior side chimneys, hip-roofed porch with tapered posts on brick piers, paired windows, transom and sidelights

Vinyl Sided Garage, **NC**

2610 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with gabled dormer, overhanging eaves, interior chimney, shed-roofed porch with Tuscan columns, transom and sidelights

2612 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, interior side chimney, hip-roofed porch with square stuccoed piers, transom and sidelights

Metal Garage

2614 1920s, Colonial Revival, 2-story, frame house, hip-roofed with cross-gables, interior-side chimney, hip-roofed porch with pedimented entry-bay and square posts, turned balustrade, transom and sidelights

Wood Shed, **NC**

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 67

Battery Court Historic District (127-5897)  
Richmond, VA

- 2618 1910s, Colonial Revival, 2-story, six-course American brick bond brick, hip-roofed with cross-gables, center pediment over projecting bay, 2 interior side chimneys, wraparound porch with pedimented entry-bay and Ionic columns, turned balustrade, lunette window, tripartite windows with arched fanlights, transom and sidelights

**The Terrace**

2400 Block (Odd)

- 2401 1910s, Colonial Revival, 2-story, frame house with brick-tex siding, hip-roofed with shed dormer, decorative glazing, wraparound porch with an entry pediment with tapered posts on rusticated block piers, tripartite window with arched fanlight, transom and sidelights
- 2405 1910s, Bungalow/Craftsman, 2-story, frame house with brick-tex siding, hip-roofed with hip-roofed dormer, exposed rafters, shed-roofed porch with a pediment and Corinthian columns, turned balustrade, decorative, tripartite window with fanlight, transom and sidelights
- 2407 1950s, **NC**
- 2411 1920s, Bungalow/Craftsman, 2-story, stuccoed house, side-gable-roofed with shed dormer, interior side chimney, paired casement windows, shed-roofed porch with Doric columns, transom and sidelights

**The Terrace**

2500 Block (Odd)

- 2501 1910s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, central interior chimney, hip-roofed porch with tapered posts, transom and sidelights
- Metal Shed
- 2503 1910s, Colonial Revival, 2-story, stuccoed house, side-gable-roofed, central interior chimney, shed-roofed porch with Tuscan columns, paired windows, transom and sidelights
- Metal Shed, **NC**
- 2505 1910s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, central interior chimney, hip-roofed porch with tapered posts, paired windows, transom and sidelights
- Metal Garage
- 2507 1910s, Colonial Revival, 2-story, frame house, side-gable-roofed, central interior chimney, shed-roofed porch with Tuscan columns, paired windows, transom and sidelights
- Metal Garage

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 68

Battery Court Historic District (127-5897)  
Richmond, VA

- 2509 1910s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, hip-roofed porch with Tuscan columns, paired windows, transom and sidelights  
Vinyl Sided Garage, **NC**
- 2511 1910s, Colonial Revival, 2-story, frame house, side-gable-roofed, exposed rafters, central interior chimney, shed-roofed porch with Tuscan columns, paired windows, transom

**The Terrace**

2600 Block (Even)

- 2600 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, overhanging eaves, interior-side chimney, hip-roofed porch with square posts
- 2602 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed, overhanging eaves, side-exterior chimney, hip-roofed porch with modern wrought iron supports  
Metal Garage/Carriage House
- 2604 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed, side-exterior chimney, hip-roofed porch with Tuscan columns, sidelights  
Metal Garage/Carriage House
- 2606 1920s, Bungalow/Craftsman, 2-story, frame house, hip-roofed with hip-roofed dormer, overhanging eaves, interior-side chimney, hip-roofed porch with tapered brick piers, arched span between piers  
Metal Garage/Carriage House
- 2608 1960s, **NC**; Metal Shed, **NC**
- 2610 1920s, Colonial Revival, 2-story, frame house, hip-roofed, side-exterior chimney, hip-roofed porch with Tuscan columns  
Metal Garage
- 2612 1920s, Bungalow/Craftsman, 2-story, frame house, hip-roofed with hip-roofed dormer, interior-side chimney, hip-roofed porch with tapered brick piers  
2-story Concrete Block Building
- 2614 1920s, Colonial Revival, 2-story, six-course American bond brick house, hip-roofed with hip-roofed dormer, interior-side chimney, hip-roofed porch with Tuscan columns
- 2616 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, central-interior chimney, hip-roofed porch with tapered stuccoed posts

United States Department of Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 7 Page 69

Battery Court Historic District (127-5897)  
Richmond, VA

- 2618 1920s, Colonial Revival, 2-story, frame house with brick-tex siding, hip-roofed with hip-roofed dormer, side-exterior chimney, hip-roofed porch with tapered posts  
Outbuilding demolished as of 2003

**The Terrace**

2600 Block (Odd)

- 2601 1910s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, hip-roofed porch with Tuscan columns  
Metal Shed
- 2603 1920s, Colonial Revival, 2-story, frame house, side-gable-roofed, central interior chimney, shed-roofed porch with Tuscan columns  
Wood Garage
- 2605 1910s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, hip-roofed porch with tapered posts  
Metal Shed, NC
- 2607 1910s, Colonial Revival, 2-story, stuccoed house, side-gable-roofed, central interior chimney, shed-roofed porch with Tuscan columns  
Stucco Garage/Carriage House
- 2609 1910s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, central-interior chimney, hip-roofed porch with tapered posts  
Metal Garage
- 2611 1920s, Bungalow/Craftsman, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, side-exterior chimney, hip-roofed porch with stuccoed posts, arched spans between posts  
Tin/Wood Garage
- 2613 1920s, Colonial Revival, 2-story, stuccoed house, hip-roofed with hip-roofed dormer, interior-side chimney, hip-roofed porch with tapered posts on stuccoed piers  
Stucco Garage
- 2615 1920s, Bungalow/Craftsman, 2-story, stuccoed house, side-gable-roofed with gabled dormer, interior chimney, shed-roofed porch with paired Tuscan columns on brick piers
- 2617 1920s, Colonial Revival, 2-story, frame house, hip-roofed with hip-roofed dormer, central interior chimney, hip-roofed porch with pedimented entry-bay and Tuscan columns



United States Department of Interior  
National Park Service

## National Register of Historic Places Continuation Sheet

Section number 8 Page 71

Battery Court (127-5897)  
Richmond, VA

### SUMMARY STATEMENT OF SIGNIFICANCE

The Battery Court Historic District exhibits the growing sophistication of Richmond, Virginia's developers in an intact neighborhood whose significance spans from 1909-1949. As the most recent (1909) of Northside's streetcar subdivisions, this development benefited from its owners' experience in 1890s ventures like Brookland Park and Chestnut Hill. The proximity of nearby Ginter Park's more spacious layout and the influence of the City Beautiful movement prompted Battery Court's owners to set aside a swath of green as a public amenity. Battery Park crosses the historic district from northwest to southeast and is the neighborhood's defining feature. Streets deform with the change in topography as they meet Battery Park. Both lots and houses take on the more generous proportions of Ginter Park at the north end of the historic district. Highland Park Realty Corporation lured tradesmen and white-collar families to new, speculatively built houses in this picturesque neighborhood with the promise of new schools and public transportation into the city.

The Battery Court Historic District meets National Register Criterion A as one of several North Richmond streetcar suburbs. Battery Court meets National Register Criterion C because of its stock of exemplary middle-class housing dating from the first half of the twentieth century.

### STATEMENT OF SIGNIFICANCE

The Battery Court Historic District is comprised of three, adjacent, residential developments: Battery Court (including Battery Court Addition), Parkland, and Roland Park. The neighborhood and the historic district are named for a Civil War era structure in Richmond's outer defense perimeter, Confederate Battery No. 8, which was located at the site of the Albert V. Norrell Elementary School Annex on Wickham Avenue. The battery overlooked the streambed of Griffin's Branch, which ran alongside the old North Richmond Road (now Hawthorne Avenue). As development of the town Barton Heights expanded north and west from its original grid, the Highland Park Realty Corporation<sup>1</sup> proposed a new suburb in 1909. The developers promised a parklike setting along the streambed, which proved so appealing that by 1913 tracts between Brookland Park Boulevard on the north, Wickham Avenue on the south and Chamberlayne Avenue on the west were laid out. At the center of the attractive suburb was Battery Park, which followed Griffin's Branch north past the old fortifications to

**United States Department of Interior**  
National Park Service

**National Register of Historic Places**  
**Continuation Sheet**

Section number   8   Page   72  

Battery Court (127-5897)  
Richmond, VA

finger into five tree-lined avenues. Today Hawthorne Avenue still retains the flavor of the development: a generous median divides the street before it continues across Brookland Park Boulevard out of the district to Pollard Park and Ginter Park Terrace.

Early in the development of neighboring Barton Heights, the land that became Battery Park remained agricultural. As Barton Heights expanded, so did the school-age population and in 1905 T. Ashby Wickham<sup>2</sup> sold a lot on Wickham Avenue between Miller and Greenwood to Henrico County's Brookland District School Board. In January 1907 an impressive Barton Heights High School building was dedicated at this northwestern limit of the town. The dedication included addresses by well-known newspaper publisher and Northside landowner John Stewart Bryan and Governor A. J. Montague,<sup>3</sup> indicating the popularity of Northside's first suburb. Less than twenty years after speculator James H. Barton broke ground in the Barton Heights; his 1889 dream of a flourishing North Richmond community became reality.<sup>4</sup>

James H. Barton's sometime competitors and partners in the Highland Park Company had created Chestnut Hill, a parallel development just east of Barton Heights, accessed by the Fifth Street Viaduct.<sup>5</sup> In general the Highland Park Company had better local connections than Barton. Officers included N. W. Bowe, the husband of one of Fendall Griffin's heirs. Griffin (1795-1872) was a delegate from Henrico County to the legislature, and owned much of the land along Griffin's Branch.<sup>6</sup>

Within two years of the high school's opening, the Highland Park Realty Corporation,<sup>7</sup> successor to the Northside Land Company and the Highland Park Company, began advertising the park-like setting along the eastern side of Griffin's Branch as the Battery Court development. Two years later, in 1911, the Battery Court Addition opened to buyers along the west side of Griffin's Branch offered by the same corporation. Located between Wickham Avenue on the south and Edgehill Road on the north, the Addition expanded development west to Chamberlayne Avenue.<sup>8</sup>

The development of Ginter Park, the suburb north of Brookland Park Boulevard, paralleled the efforts of Barton and his colleagues in the Northside Land Company.<sup>9</sup> But in contrast to the speculative nature of the latter's efforts, multi-millionaire tobacco manufacturer and philanthropist Lewis Ginter consciously sought to create a garden suburb. Since 1889, Ginter's suburb had attracted a more socially and economically established clientele. Ginter

**United States Department of Interior**  
National Park Service

**National Register of Historic Places**  
**Continuation Sheet**

Section number   8   Page   73  

Battery Court (127-5897)  
Richmond, VA

himself lived at Westbrook, an estate that lay north of the development. Housing in Ginter Park was not primarily speculative and the lot sizes were generous, with 100-foot frontages. In 1895 the Presbyterian Union Theological Seminary began building on Ginter Park's premier site on Brook Road, opposite Joseph Bryan's Laburnum. In 1890 Ginter was in contact with Frederick Law Olmstead concerning landscaping Sherwood Park, another Northside property west of Brook Road, along Brookland Park Boulevard.<sup>10</sup>

It is in this context that the Highland Park Realty Corporation established Battery Court in 1909. The first parcels developed were immediately northwest of Barton Heights, west of North Avenue between Graham Road and Norwood Avenue, and stopping at the verge of Griffin's Branch with the Terrace, a street that followed the contours of the old fortifications and faced Battery Park. This property belonged to Mrs. Fannie Graham, whose name would be perpetuated in Graham Road. Within two years (1911) more Graham land to the west across the park was opened up from Wickham Street to Edgehill Road in the north and bounded by Chamberlayne Avenue on the west.<sup>11</sup> Lot widths in this area were 50 feet in contrast to 35 feet in the original offerings across the park to the east.

Not to be outdone, the Barton Heights Realty and Improvement Company (James H. Barton's successors) opened up the Parkland subdivision in 1910. South of the Brookland Park Boulevard these properties were adjacent to Brookland Park, the 1890 development of Barton and Joseph M. Fourqurean at the intersection of North Avenue and Brookland Park Boulevard (then called simply the Boulevard). In 1890 this land had been Lot no. 2 in the subdivision of the lands of Edward Griffin's property<sup>12</sup> and was assigned to George N. Griffin. An access road across two other Lots was cut from the North Road westward: the genesis of today's Essex Street.<sup>13</sup> The lot sizes in Parkland were 50-feet wide and fronted two streets, Melrose and Edgewood.

Roland Park (1913) was developed by the Highland Park Realty Company, and bounded by Brookland Park Boulevard on the north, the Chamberlayne Avenue properties of the Lewis Ginter Land & Improvement Company (Chamberlayne Place) on the west,<sup>14</sup> and the Parkland development on the east. This property was the last of the lands owned by Emma L. Bowe, widow of N. W. Bowe and heiress to Fendall Griffin's property.<sup>15</sup> Roland Park lay immediately to the south of Ginter Park's Hawthorne and Noble Avenues. As a result of the Roland Park

**United States Department of Interior**  
National Park Service

**National Register of Historic Places**  
**Continuation Sheet**

Section number   8   Page   74  

Battery Court (127-5897)  
Richmond, VA

development, those roads were extended, accomplishing a visual connection between Battery Park and Pollard Park, across Brookland Park Boulevard. Again the lots were 50-feet wide.

The public lands of Battery Park (11.8 acres) were deeded to the city in 1922 at a cost of \$17,500. In 1928 Griffin's Branch was filled in, and over the next decade the playgrounds and other amenities were completely rebuilt with help from Works Progress Administration (WPA) funding. In 1942 the Battery Park Community House was dedicated. This charming park structure was faced with discarded cobble stones.<sup>18</sup>

There are two churches located in Battery Park. The 1920s Overbrook Presbyterian (now All Souls) stands at 19 Overbrook Road at the southeastern corner of Miller Avenue. The home-like Battery Park Christian Church (now Mount Hermon Baptist Church) at 2814 Moss Side Avenue was built by 1932 at the northern edge of the park. A suburban Henrico congregation retains the Overbrook name at its church on Dumbarton Road, and Battery Park Christian has moved to a more substantial sanctuary at Bellevue Avenue and Brook Road in Ginter Park. The historic church buildings continue to serve active congregations.

The residents of the neighborhood enjoyed proximity to prestigious Ginter Park, but socially they were solidly middle class. In the 1920s Bascom J. Rowlet, an architect lived at 2800 Dupont Circle. C. C. Davis, an architect with Imperial Tobacco, lived at 2812. George Bernier, superintendent with the Home Brewing Company was at 2814. Barney Briel, the grocer from North Avenue, whose family had lived in North Richmond since the mid-nineteenth century, owned 2810 Dupont Circle. On Hawthorne, Meverell B. Van Doren, a contractor, lived at 2911 for three decades. T. J. Cromar, a stone setter, was living in the unique stone-faced 2809 Montrose in the 1920s. The handsome façade of this house was probably an example of the original owner's handiwork.

By Peter McDearmon Witt

**United States Department of Interior**  
National Park Service

**National Register of Historic Places**  
**Continuation Sheet**

Section number   9   Page   75  

Battery Court (127-5897)  
Richmond, VA

**BIBLIOGRAPHY**

Anonymous, "Programme of Opening Exercises Barton Heights High School Building." 18  
January 1907.

Henrico County Deed Book 105:438.

Henrico County Deed Book 113:441-442. 2 June 1884.

Henrico County Deed Book 131A: 387.

Hill's Richmond City Directory (1915, 1922, 1932, 1940)

Richmond Times. "Bartonsville." 4 April 1889, p.8, c. 4.

Richmond Times-Dispatch. Obituary for Judge Turner Ashby Wickham, 21 August 1939

Ryan, David D. and Wayland W. Rennie. Lewis Ginter's Richmond. Richmond, 1991.

**United States Department of Interior  
National Park Service**

**National Register of Historic Places  
Continuation Sheet**

Section number   10   Page   76  

Battery Court (127-5897)  
Richmond, VA

**GEOGRAPHICAL DATA**

No.	Zone	Easting	Northing
E.	18	284880	4169960
F.	18	284880	4159920
G.	18	284790	4159920
H.	18	284790	4169975
I.	18	284708	4160020
J.	18	284650	4159940
K.	18	284183	4160020
L.	18	284090	4160905

**Verbal Boundary Description**

Beginning at the point where the south line of Brookland Park Boulevard intersects with the western line of Griffin Avenue; then continuing west along the southern edge of Brookland Park Boulevard to the point of intersection with the eastern line of the north-south alley parallel to Chamberlayne Avenue to the west of Hawthorne Avenue; then continuing south along the eastern edge of the alley crossing Hammond Street, Edgehill Road, West Lancaster Road, Overbrook Road, and West Graham Road to the property line separating parcels N000-0589-006 and 010; then continuing south along this property line to a point of intersection with the northern line of Wickham Street; then east along the northern side of Wickham Street crossing Tazewell Street, Hawthorne Avenue to a point of intersection with the eastern side of Fendall Avenue; then proceeding north along the eastern edge of Fendall Street to a point of intersection with the south line of the alley bordering parcel N000-0485-008; then proceeding east along the south line of the alley to the east side of parcel N000-0485-008; then proceeding south along the eastern side of said parcel to a point of intersection with the extension of the property line separating parcels N000-0485-003 and 004; then east along said line crossing Greenwood Avenue to a point of intersection with the west side of parcel N000-0486-001; then proceeding south along said property line to a point of intersection with the

**United States Department of Interior**  
National Park Service

**National Register of Historic Places**  
**Continuation Sheet**

Section number 10 Page 77

Battery Court (127-5897)  
Richmond, VA

northside of Wickham Street; then proceeding east along the north side of Wickham road to a point of intersection with the west side of Miller Avenue; then proceeding north along the western edge of Miller Avenue to a point of intersection with a line extended across Miller Avenue from the northside of the alley between west Graham Road and Wickham Street; then proceeding east along said line, following the north side of the alley and crossing Rose Avenue to a point of intersection with the east side of Rose Avenue; then proceeding south along the east side of Rose Avenue to a point of intersection with the property line separating parcel N000-0488-010 from parcels N000-0488-001 and 002; then proceeding east to a point of intersection with the western edge of parcel N000-0488-004; then proceeding south along the west side of said parcel to a point of intersection with the property line separating parcel N000-0488-004 from N000-0488-005; then proceeding east along said property line to a point of intersection with the west side of North Avenue; then proceeding north along the west side of North Avenue, crossing West Graham Road, Overbrook Road, and West Lancaster Road to a point of intersection with the south side of West Norwood Avenue; then proceeding west along the south side of Norwood Avenue crossing Miller Avenue and Fendall Avenue to a point of intersection with the west side of Griffin Avenue; then proceeding north along the west side of Griffin Avenue, crossing Hooper and Essex streets to a point of intersection with the south side of Brookland Park Boulevard, and thus back to the point of beginning.

**Verbal Boundary Justification**

The boundaries for the proposed Battery Court Historic District are based on a 1911 plat for Battery Court (1909), Battery Court Addition (1911), Parkland (1910) and Roland Park (1913). These developments were combined in a single historic district because of their proximity to Battery Park and their dates of subdivision. Noncontributing properties at the edges of these subdivisions were excluded from the historic district boundaries.

United States Department of the Interior  
National Park Service

National Register of Historic Places  
Continuation Sheet

Section number 11 Page 81

Battery Court (127-5897)  
Richmond, VA

Endnotes Section 7

<sup>1</sup> Typical lots in Battery Park are fifty feet wide. In contrast Brookland Park lots are only thirty feet wide. Lot sizes are indicated in early neighborhood plats archived by Richmond's Planning Department.

<sup>2</sup> Barney Briel's grocery was at 2208 North Avenue in Brookland Park.

<sup>3</sup> Hill's Richmond City Directory (1922)

<sup>4</sup> Hill's Richmond City Directory (1932, 1940)

Endnotes Section 8

<sup>1</sup> Predecessors of Highland Park Development Corporation had developed Chestnut Hill across the Richmond Henrico Turnpike from the town.

<sup>2</sup> Turner Ashby Wickham was a judge of the Henrico County Circuit Court (1894-1904) and at one time lived in Spokane Washington. He also served in the Virginia State Senate: □ Judge T. Ashby Wickham, 82, Dies at His Home, Woodside, *Richmond Times-Dispatch* 21 August 1939.

<sup>3</sup> "Programme of Opening Exercises Barton Heights High School Building" (18 January 1907), pamphlet.

<sup>4</sup> "Bartonsville." *Richmond Times*, 4 August 1889. p.8 c.4.

<sup>5</sup> The Fifth Street Viaduct was an enterprise of the Northside Railway (or Viaduct) Company. Officers of the North-Side Railway Company (1890) were Norman V. Randolph, J. M. Fourqurean, A.F. Mosby, Peter Sublett, and B.F. Johnson (Virginia State Corporation Commission records).

<sup>6</sup> Bowe was a founding director of Northside Viaduct (1890). Virginia State Corporation Commission *Book 11* p.386. Norman Randolph was president and J.M. Fourqurean vice president.

<sup>7</sup> By 1915 Eugene B. Sydnor was president, Dr Thomas Merrick vice president, attorney Julien Gunn secretary and John W. McComb treasurer: Hill's Richmond City Directory (1915).

<sup>8</sup> Adjacent property was owned by the Lewis Ginter Land & Improvement Company and N. W. Bowe west of Chamberlayne. See T. Crawford Redd & Bro., surveyors & engineers □ Plan of Battery Court Addition in Henrico County. "Property of the Highland Park Realty Corporation", 20 November 1911.

<sup>9</sup> David D. Ryan & Wayland W. Rennie *Lewis Ginter's Richmond* (Richmond:1991) p.20ff.

<sup>10</sup> Ryan pp.33-4.

<sup>11</sup> In 1884 the lands south of present-day Norwood Avenue east of North avenue were in the hands of Mrs. Fannie Graham: Henrico County *Deed Book 113* p. 442. See T. Crawford Redd's survey "Plan of Battery Court Addition," etc. 20 November 1911: "Traced from Ended File 180, H[enrico] C[ounty] C[ircuit] C[ourt] Graham's Trustee vs Graham."


<sup>12</sup> Henrico County *Deed Book 113* p.442 2 June 1884.

<sup>13</sup> Henrico County *Deed Book 113* p.441: "It is also mutually agreed that a Road 20 □ feet wide leading from the North Road to parcel No. 2 as shown on the Map is to be kept open for the common use of the owners of all the lands hereby conveyed and a convenient right of way is to be allowed to all of the said owners from the western terminus of the 20-ft Road to the Road that passes through the land of Mr. John W. Gordon."

<sup>14</sup> Survey of T.C. Redd & Bro. 4 Feb 1913: "Map of Ginter Park Terrace."

<sup>15</sup> In 1915 Mrs. Bowe was president of N. W. Bowe Real Estate and Loans. The Bowes also owned the land west of Chamberlayne, which had been the land of John W. Gordon through the 1880s.

<sup>18</sup> Typescript of Xenophon Morris, *Battery Park Playground and Park* (Department of Recreation and Parks: 31 March 1971) from the collections of the Richmond Public Library, Main Library.

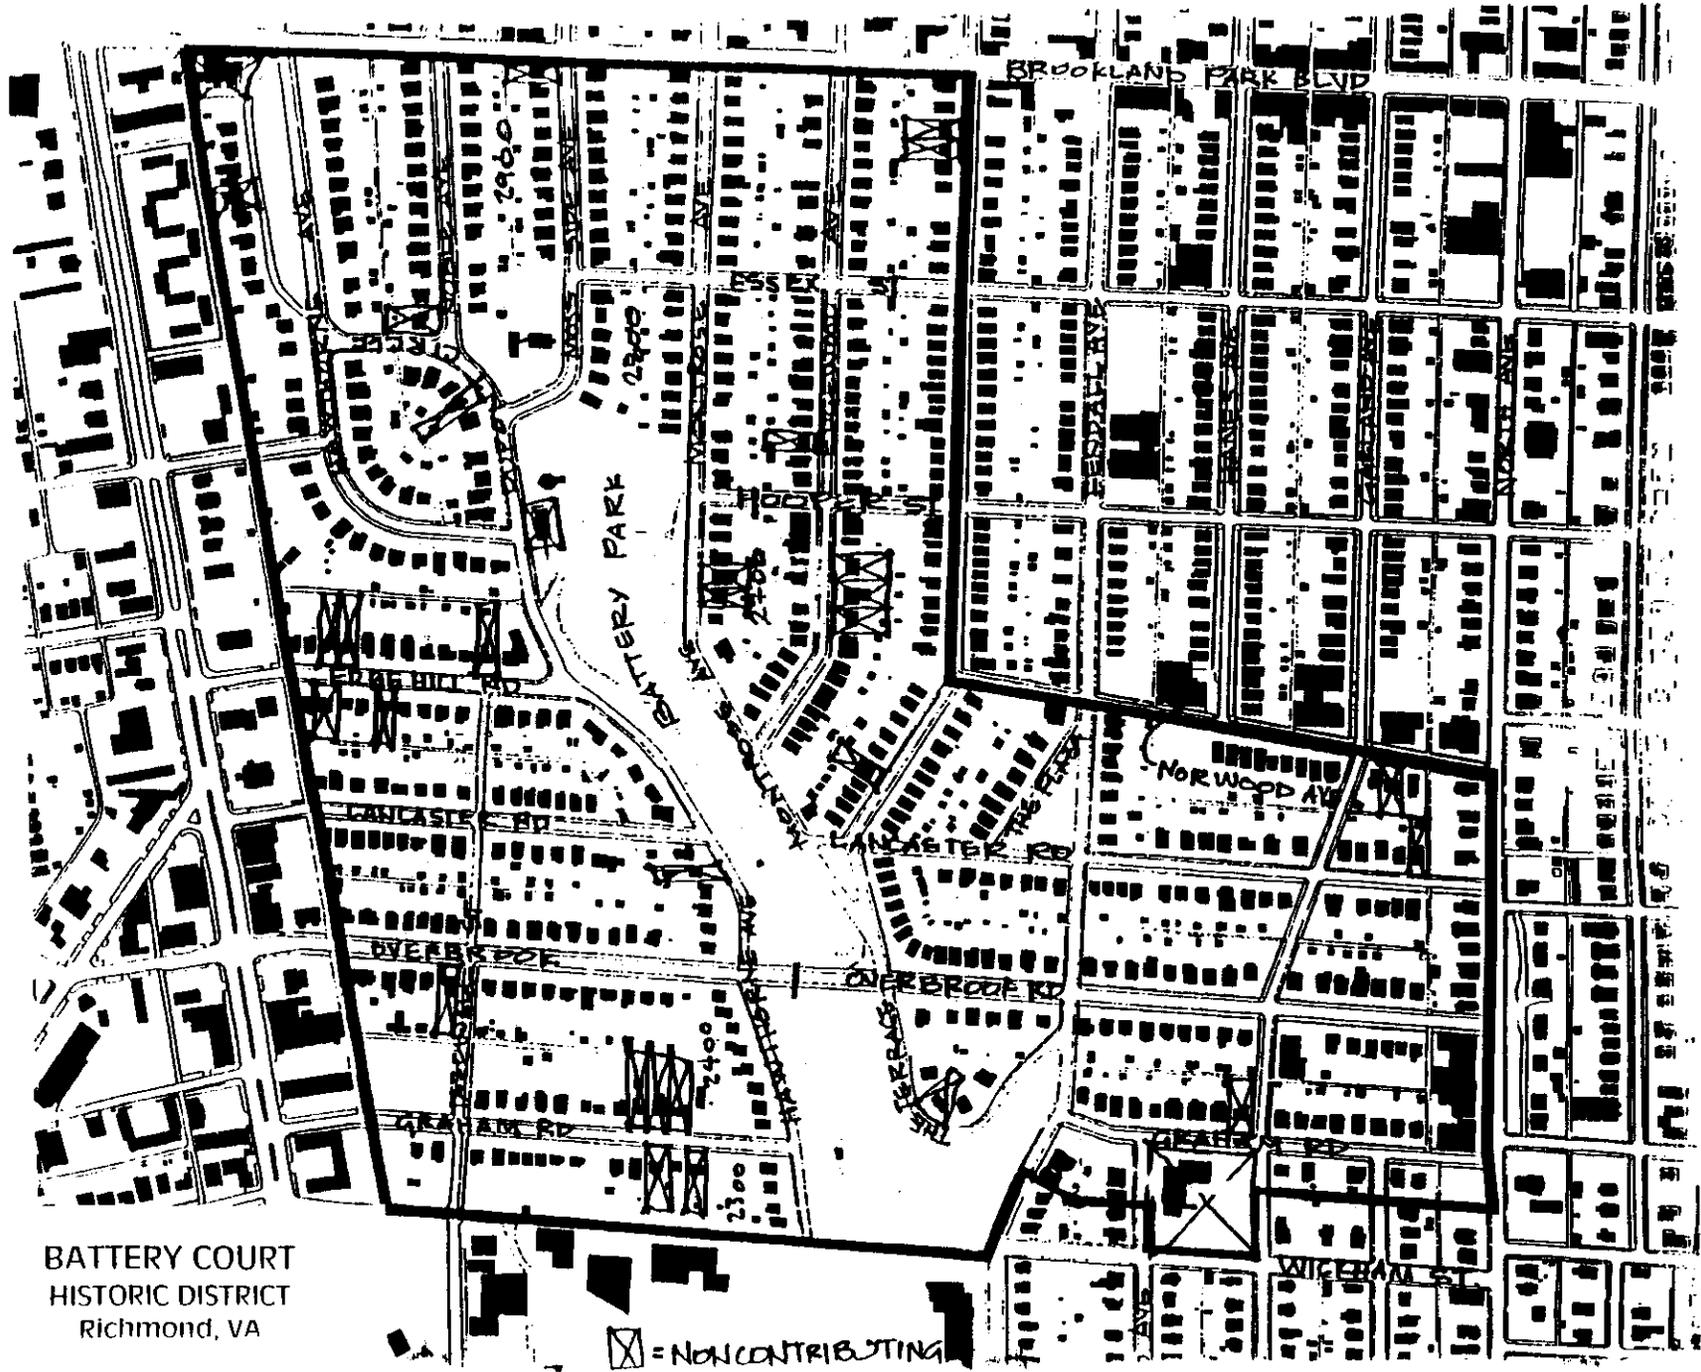

BATTERY COURT  
HISTORIC DISTRICT  
Richmond, VA

X = NON CONTRIBUTING



165  
164  
163  
30  
162  
161  
160  
159  
158  
157  
156  
155  
154  
153  
152  
151  
150  
149  
148  
147  
146  
145  
144  
143  
142  
141  
140  
139  
138  
137  
136  
135  
134  
133  
132  
131  
130  
129  
128  
127  
126  
125  
124  
123  
122  
121  
120  
119  
118  
117  
116  
115  
114  
113  
112  
111  
110  
109  
108  
107  
106  
105  
104  
103  
102  
101  
100  
99  
98  
97  
96  
95  
94  
93  
92  
91  
90  
89  
88  
87  
86  
85  
84  
83  
82  
81  
80  
79  
78  
77  
76  
75  
74  
73  
72  
71  
70  
69  
68  
67  
66  
65  
64  
63  
62  
61  
60  
59  
58  
57  
56  
55  
54  
53  
52  
51  
50  
49  
48  
47  
46  
45  
44  
43  
42  
41  
40  
39  
38  
37  
36  
35  
34  
33  
32  
31  
30  
29  
28  
27  
26  
25  
24  
23  
22  
21  
20  
19  
18  
17  
16  
15  
14  
13  
12  
11  
10  
9  
8  
7  
6  
5  
4  
3  
2  
1  
0

PATTERSON COUNTY  
HISTORIC DISTRICT  
RICHMOND, VA  
#127-5897

UTM REFERENCE  
Easting: 18 240 105 440 000  
Northing: 18 240 105 440 000  
Zone: 18  
Datum: NAD 83  
Units: UTM  
Projection: UTM  
Scale: 1:50,000  
Datum: NAD 83  
Units: UTM  
Projection: UTM  
Scale: 1:50,000

1:50,000  
NAD 83  
UTM  
18 240 105 440 000